

SECTION A–A: right at 46.3° (a node-1 post), left at 106.3° (a node-2 post) 1:2

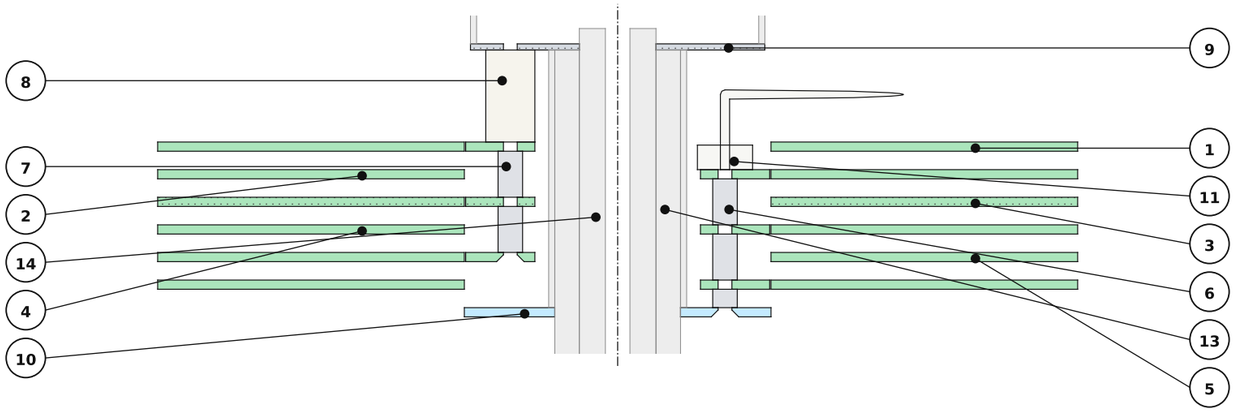

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	CAP-615	Ca plate, node-2 base (Ca_06)	Al	1
2	CAP-612	Ca plate, node-1 end (Ca_05)	Al	1
3	CAP-613	Ca plate, node-2 (Ca_04)	Al	1
4	CAP-611	Ca plate, node-1 (Ca_03, Ca_01)	Al	2
5	CAP-614	Ca plate, node-2 end (Ca_02)	Al	1
6	CAP-616	post spacer Ø8 (node 1)	Al	9
7	CAP-616	post spacer Ø8 (node 2)	Al	6
8	CAP-617	steatite standoff	steatite C 221	3
9	CAN-402	can end disc	Al	1
10	CAP-602	rotor vane r01 (the comb's top)	Al	1
11	DCK-501	the riser, its boot	PTFE HV wire, silicone	2
12	DCK-501	the tap, its boot	PTFE HV wire, silicone	2
13	SHF-304/-306	rotor sleeve, PTFE cover (ref.)	—	ref.
14	CAN-401	the can, shaft (for reference)	—	ref.

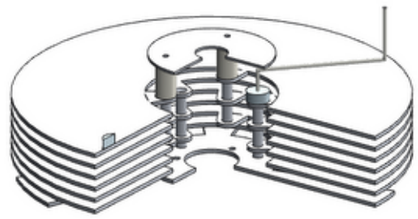

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

NOTES

1 The node-1 comb (Ca_05, Ca_03, Ca_01) hangs from r01 on three posts of Al spacers Ø8 joined by M4 A4 studs through the tabs; flush M4 countersunk screws where a face meets a working gap.
2 The node-2 comb (Ca_06, Ca_04, Ca_02) stands on three steatite standoffs on the can's disc, M4 button heads from inside the can.
3 No support touches two adjacent plates: each post passes the other comb's plates 11 mm off their bore (the corona margin 1.05, as the C1 rims: sim/doubler-caps-findings.md §3). Gauge the 6 mm gaps at the three posts and the rim.
4 The riser's ring lug under post 1's button head and the tap's on Ca_06, each in a silicone boot.

DCCREG turbine · the doubler: Ca / Cb		
Ca / Cb column, side A: the two combs on their posts		Drawing no.
Material:		**DCCREG-CAP-610**
Mass: —	Qty per machine: 2	Rev A Sheet 40 of 79 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**