

PLAN 1:2

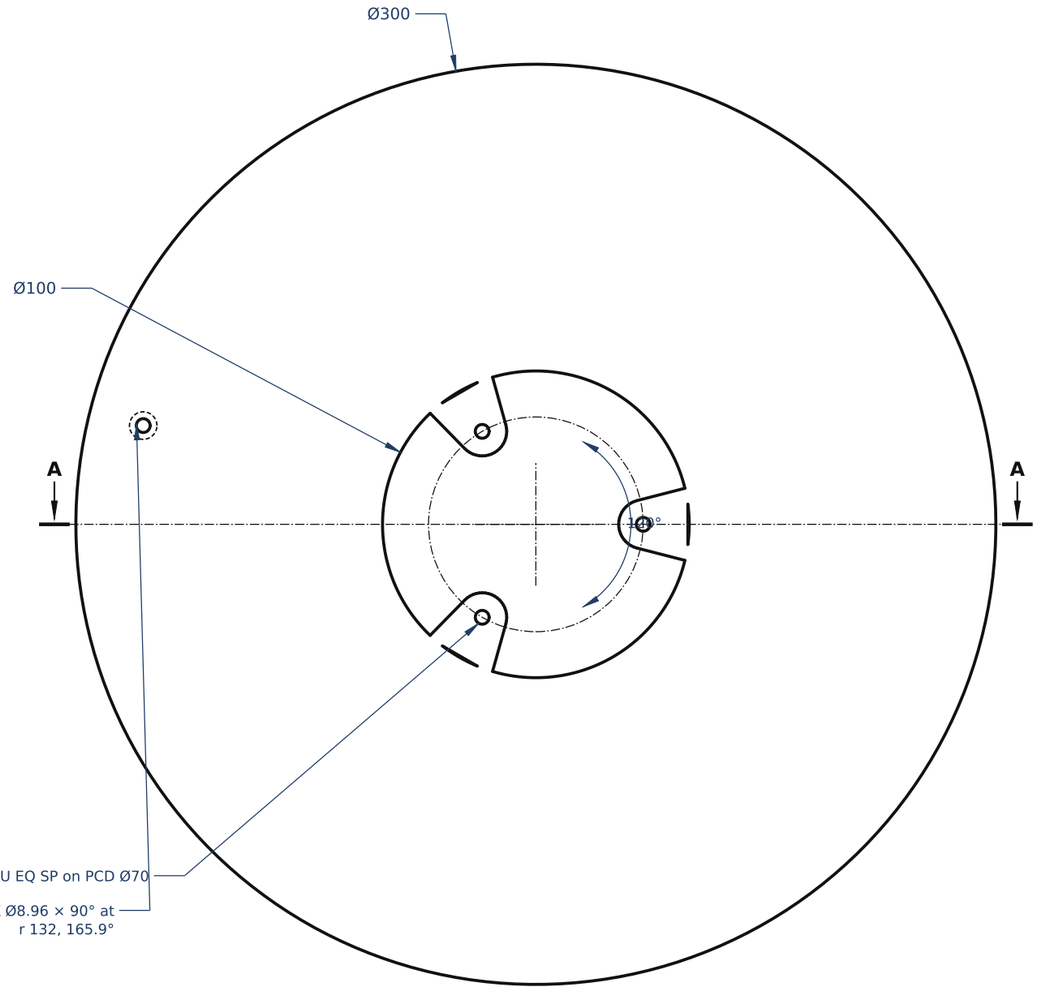

SECTION A–A 2:1

(its part from r 24 to 58)

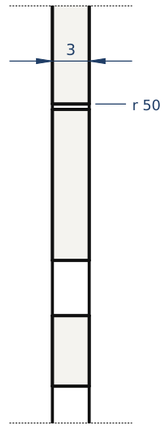


NOTES

1. A full annulus r 50-150 (the record's), 3.0 thick, with three tabs into the bore to r 27 at 120°: each the hull of a lobe R8 round its post at r 35 and a 24 mm chord on the bore.
2. Three holes for the standoffs' studs; the tap's hole at r 132 countersunk M4 on the face toward Ca_05 (hand A drawn; hand B the mirror).
3. Every rim a full round R1.5 (t / 2), burr-free, Ra ≤ 0.8 µm: the record's rims are full rounds on a handled surface (Peek m 0.85, sim/vane-matrix-findings.md §2). Clean with IPA after the last operation; handle with gloves.
4. Flatness 0.10 over the whole plate; parallelism of the faces 0.05: the 6 mm working gaps (sim/stack_sizing.py).
5. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	CAP-610
source	sim/doubler_caps.py tab_outline, placement; sim/multiplier_layout.py (the record's plates r 50-150)
node	2 / 3
holds	13.2 kV DC to its neighbours (Ca, 6 mm)
mass each	0.518 kg

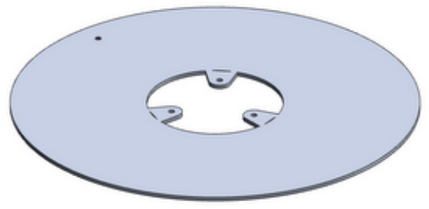

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: Ca / Cb

Ca plate, node-2 comb's base (Ca_06), hands A / B		Drawing no.
Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), plate 3.0		**DCCREG-CAP-615**
Mass: 0.518 kg	Qty per machine: 2	Rev A Sheet 45 of 79 A3
Scale: 1:2, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**