SECTION A–A 1:10

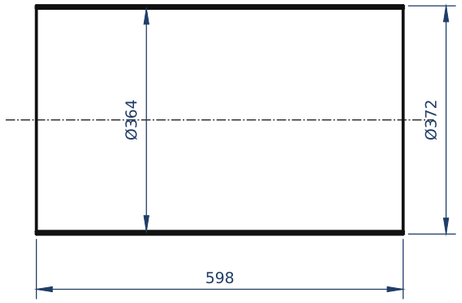

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	1
used in	CGE-900
source	sim/doubler_caps.py CAGE_R0, CAGE_R1
mass each	5.12 kg

VIEW B 1:20



DETAIL D 2:1 (A–A, z 0 to 40)

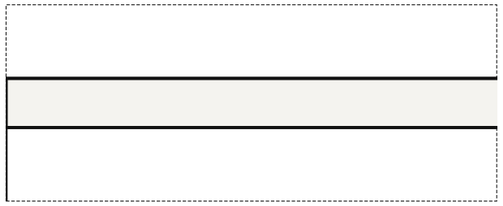

NOTES

1. Bore Ø364 H9: the stator vanes' lugs, the end rings and the Ca|reluctance spiders locate in it (bonded).
2. 598 long, spider to spider; 32 mm from the decks' outermost housings (sim/doubler-caps-findings.md §2).
3. G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

3-D view (axonometric, not to scale)

DCCREG turbine · the counter-rotor

Cage tube, G10, Ø364 / 372		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube		**DCCREG-CGE-901**
Mass: 5.12 kg	Qty per machine: 1	Rev A Sheet 68 of 79 A3
Scale: 1:10, 1:20, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**