

SECTION A–A 2:1

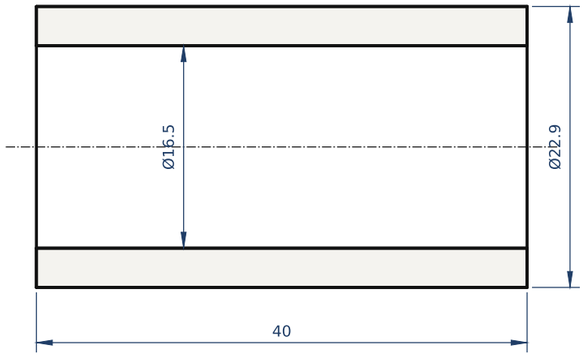

VIEW B 1:1



NOTES

1 160 turns on the former HUB-205, as sim/ah_winding.py winds it; the leads to the shaft's LV bore (the LV cable, P-010).
2 Impregnate (VPI, class F) after winding; the envelope as drawn is the winding's.
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	LOCKED
qty per machine	2
used in	HUB-200
source	presets/hub-locked.json AH; sim/ah_winding.py
mass each	0.04 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the hub

AH coil, 160 turns

Material: Cu magnet wire, grade 2 (IEC 60317), impregnated

Drawing no. **DCCREG-HUB-206**

Mass: 0.04 kg	Qty per machine: 2	Rev A Sheet 9 of 79 A3
Scale: 2:1, 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**