
ENVELOPE (as the model draws it) 1:1

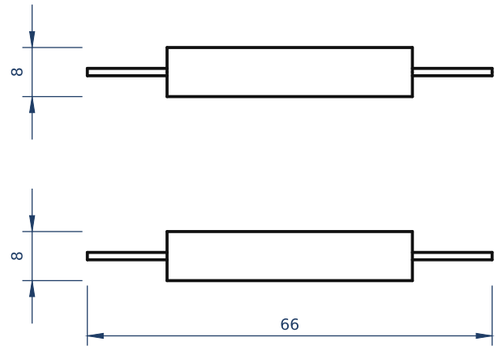

specification	value
value	22 kΩ ±10 %; ≥ 1 W; standing ≥ 15 kV DC across its body; pulse-rated (a flashover's surge)
candidate	Vishay Techno FHV axial series (thick film, 100 Ω-10 GΩ, up to 15 kV, pulse-optimised): the 22 kΩ ordering code to be read off its datasheet
alternate	two 11 kΩ / 10 kV parts in series in the same potting (Welwyn VRW class)
envelope	the layout's Ø8 × 40 body [RH]
where	R1-R4 (four per machine)

NOTES

1 No catalogue listing of exactly 22 kΩ at ≥ 15 kV was found in this session's search: the FHV series' range covers it; confirm the code, the voltage and the pulse rating on its datasheet.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	4
used in	DCK-505
source	sim/parts-first-cut-findings.md (the surge resistors); Vishay Techno FHV



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Surge resistor, 22 kΩ, ≥ 15 kV, ≥ 1 W

Drawing no. **DCCREG-P-005**

Material: HV thick-film resistor, axial

Mass: —	Qty per machine: 4	Rev A Sheet 73 of 79 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**