
ENVELOPE (as the model draws it) 1:1

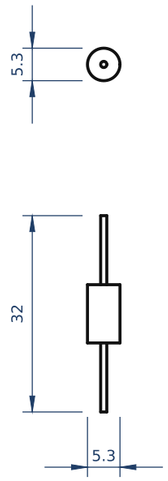

specification	value
rating	VBR 190-210 V at IT 1 mA (the clamp's own current); 1500 W peak pulse
candidates	Littelfuse 1.5KE200A; Vishay 1.5KE200A (the same JEDEC part)
lot	one lot, sorted on VBR at 1 mA, trimmed to the string's V_op (sim/multiplier-layout-findings.md §6: 60 parts hold the rings at ±14.77 kV)
envelope	DO-201: Ø5.3 × 9.5 body, Ø1.0 leads (drawn here; the module's meander in DCK-509)
where	Z1 and Z4: 66 a string, two strings

NOTES

1 16 mW per part against a ≥ 1.5 W rating, ×90 (sim/parts-first-cut-findings.md §2).

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	132
used in	DCK-509
source	sim/parts-first-cut-findings.md §2 (Z1, Z4: 66 × 1.5KE200A)



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

TVS diode 1.5KE200A (the clamp strings)

Drawing no. **DCCREG-P-006**

Material: unidirectional TVS, 1500 W, DO-201

Mass: — Qty per machine: 132 Rev A Sheet 74 of 79 A3

Scale: 1:1 Tolerances: ISO 2768-mK Date: 2026-10-11

Drawn: generated by docs/make_drawing_set.py Checked: — Approved: — **BOUGHT · SOURCE CONTROL**