

PLAN 2:1

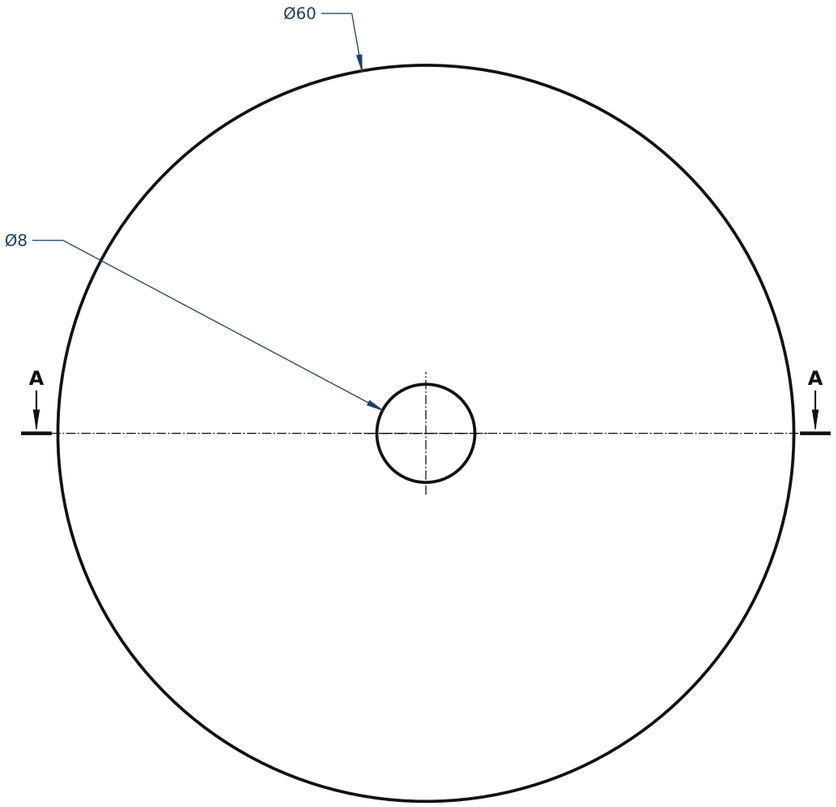

SECTION A–A 2:1

(its part from r 0 to 30)

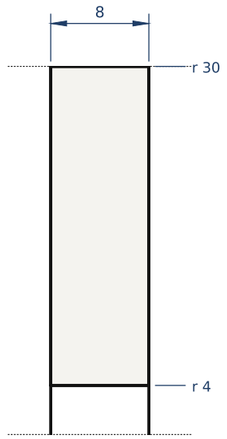


NOTES

1 Turned to Ø60 to sit in the coupler's bore; butt-welded to its shaft half's end and turned true after welding [IR]; the LV bore Ø8 through both.
2 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	SHF-300, HUB-200
source	presets/hub-locked.json shaft (flange_absz 72-80); docs/rings-design.md §2
mass each	0.174 kg

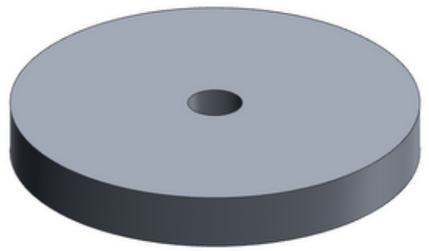

3-D view (axonometric, not to scale)

DCCREG turbine · the shaft

Shaft-half flange, Ø60 × 8

Drawing no. **DCCREG-SHF-303**

Material: austenitic stainless 1.4404 (316L), non-magnetic (μr ≤ 1.05)

Mass: 0.174 kg	Qty per machine: 2	Rev A Sheet 13 of 79 A3
Scale: 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**