

SECTION A–A 1:1

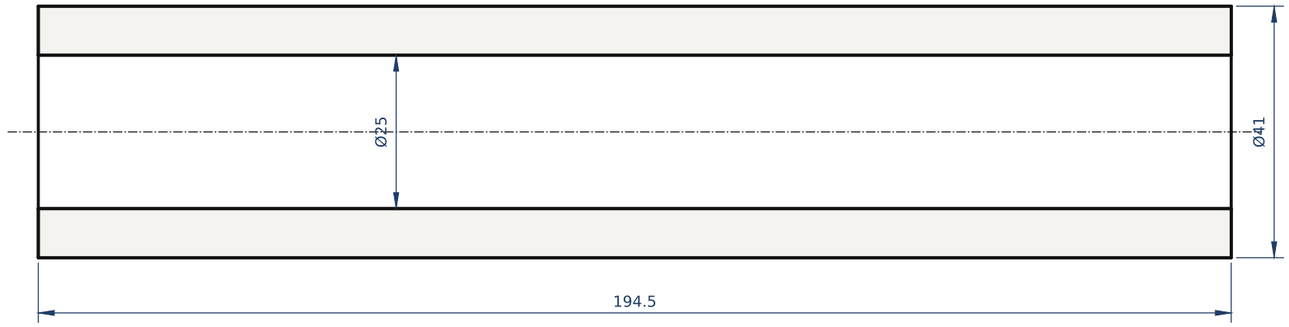

VIEW B 1:2



NOTES

1. Ø25 H7 bore on the shaft, Ø41 g6 for the rotor vanes and their spacer rings (CAP-600).
2. 8 mm of G10 between node 1's vane rings and the shaft: 0.53 pF per mm (sim/tube-strays-findings.md §3).
3. G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	SHF-300, CAP-600
source	sim/stack_sizing.py SLEEVE_R; sim/multiplier_layout.py stack (h 87-281.5)
mass each	0.298 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the shaft

Rotor sleeve, the vane bay, G10		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube		**DCCREG-SHF-304**
Mass: 0.298 kg	Qty per machine: 2	Rev A Sheet 14 of 79 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**