

SECTION A–A 1:1

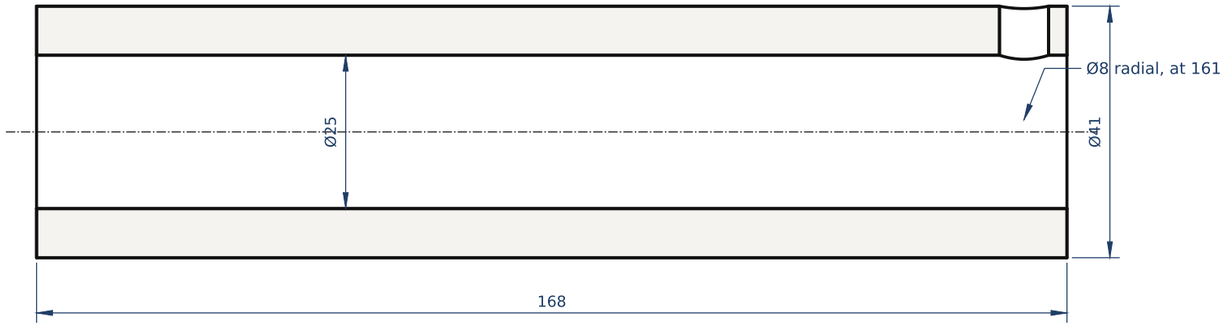

VIEW B 1:2



NOTES

1 The LV cable's radial exit Ø8 as drawn; side B's is the mirror.
2 G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	SHF-300, REL-710
source	sim/tube_geometry.py LayoutMachine (LV_EXIT)
mass each	0.257 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the shaft

Rotor sleeve, the reluctance bay, G10 (A; B mirror)

Drawing no. **DCCREG-SHF-305**

Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube

Mass: 0.257 kg · Qty per machine: 2 · Rev A Sheet 15 of 79 A3

Scale: 1:1, 1:2 · Tolerances: ISO 2768-mK · Date: 2026-10-11

Drawn: generated by docs/make_drawing_set.py · Checked: — Approved: — · **PROPOSED · DRAFT**