SECTION A–A 1:1

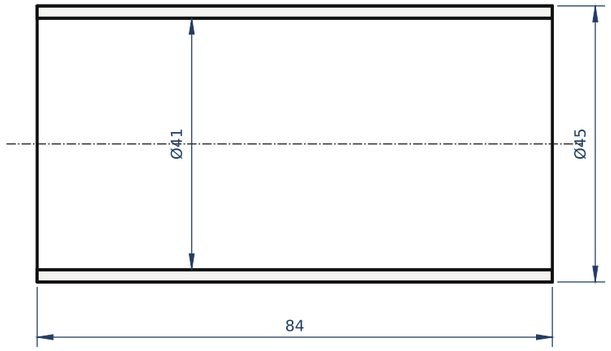

VIEW B 1:2



NOTES

1 84 mm of PTFE creepage from the can's disc to the first rotor vane (61.7 mm needed at 9.87 kV rms, PD2 group I × 1.25).
2 Bonded on the sleeve (etched PTFE, epoxy); no node-1 metal may touch it.
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	SHF-300
source	sim/multiplier-layout-findings.md §4; sim/doubler-caps-findings.md §2
mass each	0.0499 kg

3-D view (axonometric, not to scale)

DCCREG turbine · the shaft

PTFE cover over the sleeve

Drawing no. **DCCREG-SHF-306**

Material: PTFE, virgin (unfilled)

Mass: 0.0499 kg	Qty per machine: 2	Rev A Sheet 16 of 79 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**