

PLAN 1:1

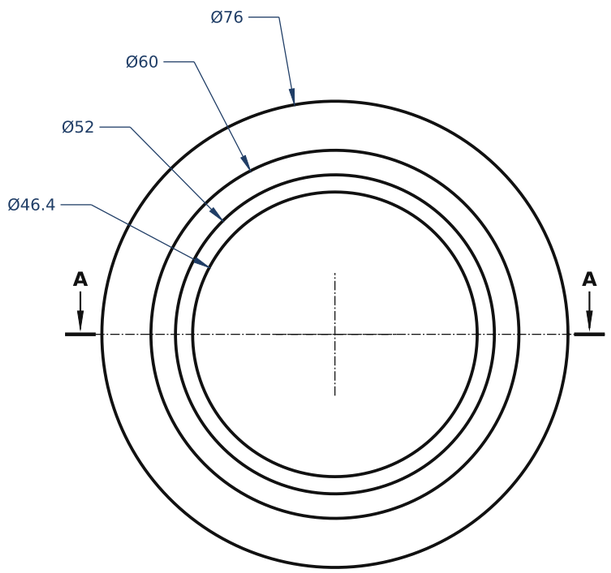

SECTION A–A 5:1


(its part from r 20 to 40)

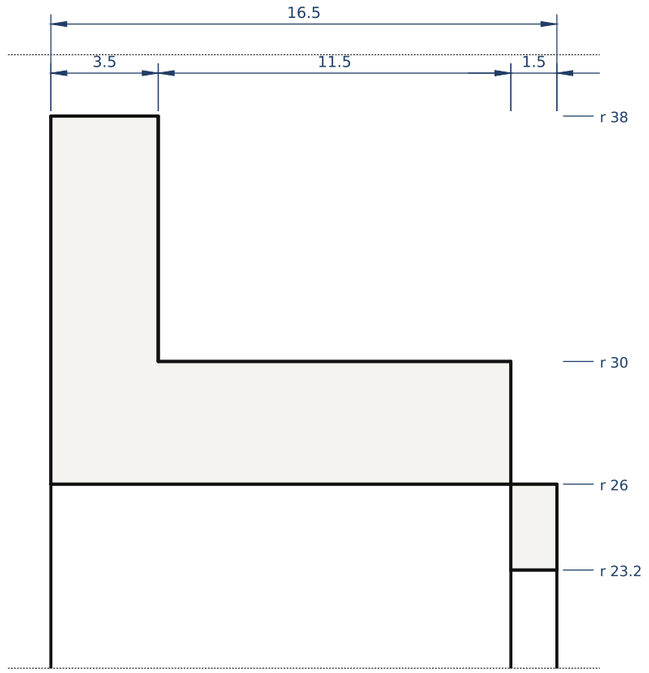

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	BRG-802
source	sim/bridge_ring_bearings.py CART_R1, CART_FLANGE_R1, CART_LIP_R0
mass each	0.135 kg

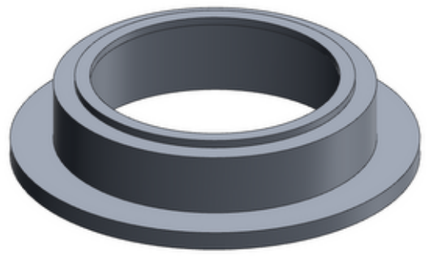

3-D view (axonometric, not to scale)

NOTES

1. Bore Ø52 H7 for the 6205's outer ring; the lip Ø46.4 over it (its housing abutment); the flange on the spider's outboard face, three M5 to the spider [IR].
2. Non-magnetic: μr ≤ 1.05 after machining.
3. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

DCCREG turbine · the bearings

Cartridge, the bridge-ring bearing's (-01 A; -02 B the mirror)		Drawing no.
Material: austenitic stainless 1.4404 (316L), non-magnetic (μr ≤ 1.05)		**DCCREG-BRG-814**
Mass: 0.135 kg	Qty per machine: 2	Rev A Sheet 69 of 103 A3
Scale: 1:1, 5:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**