

PLAN 1:1

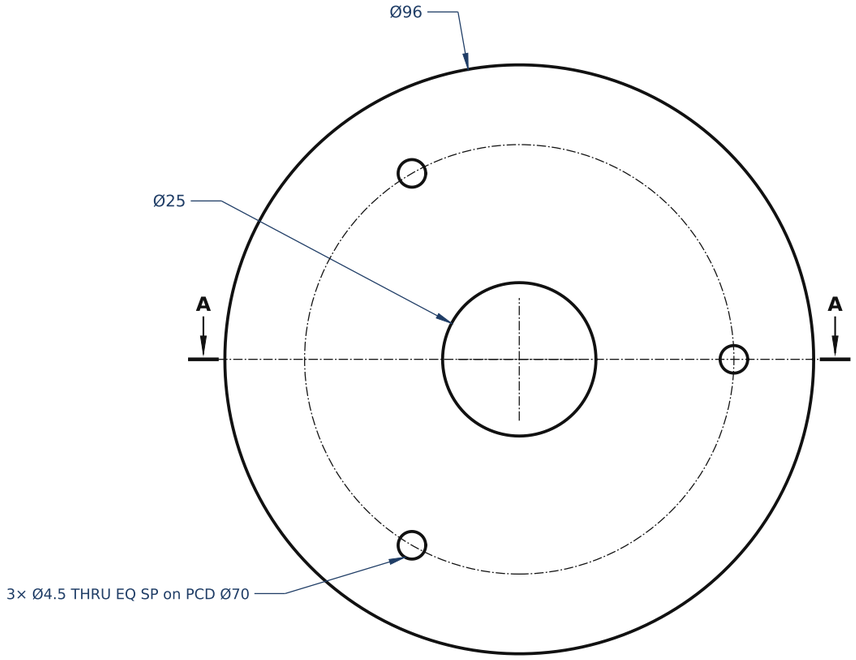

SECTION A–A 2:1

(its part from r 8 to 48)

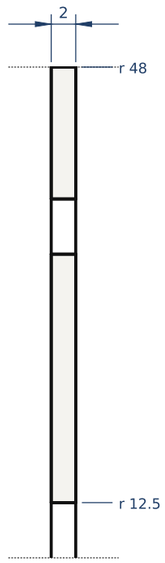


REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	CAN-400, CAP-610
source	sim/doubler_caps.py placement (the standoffs)
mass each	0.0362 kg

NOTES

1 On the shaft (Ø25 H7), bonded to the can. The three M4 holes take node 2's steatite standoffs (CAP-617) with button-head screws from inside the can.
2 Side B's is the same part, turned to its side's angles.
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

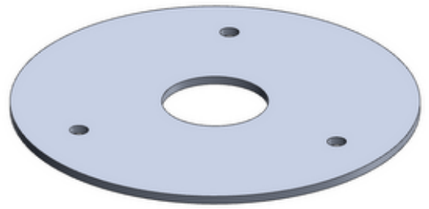

3-D view (axonometric, not to scale)

DCCREG turbine · the can

Can end disc, three M4 holes		Drawing no.
Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR])		**DCCREG-CAN-402**
Mass: 0.0362 kg	Qty per machine: 2	Rev A Sheet 20 of 103 A3
Scale: 1:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**