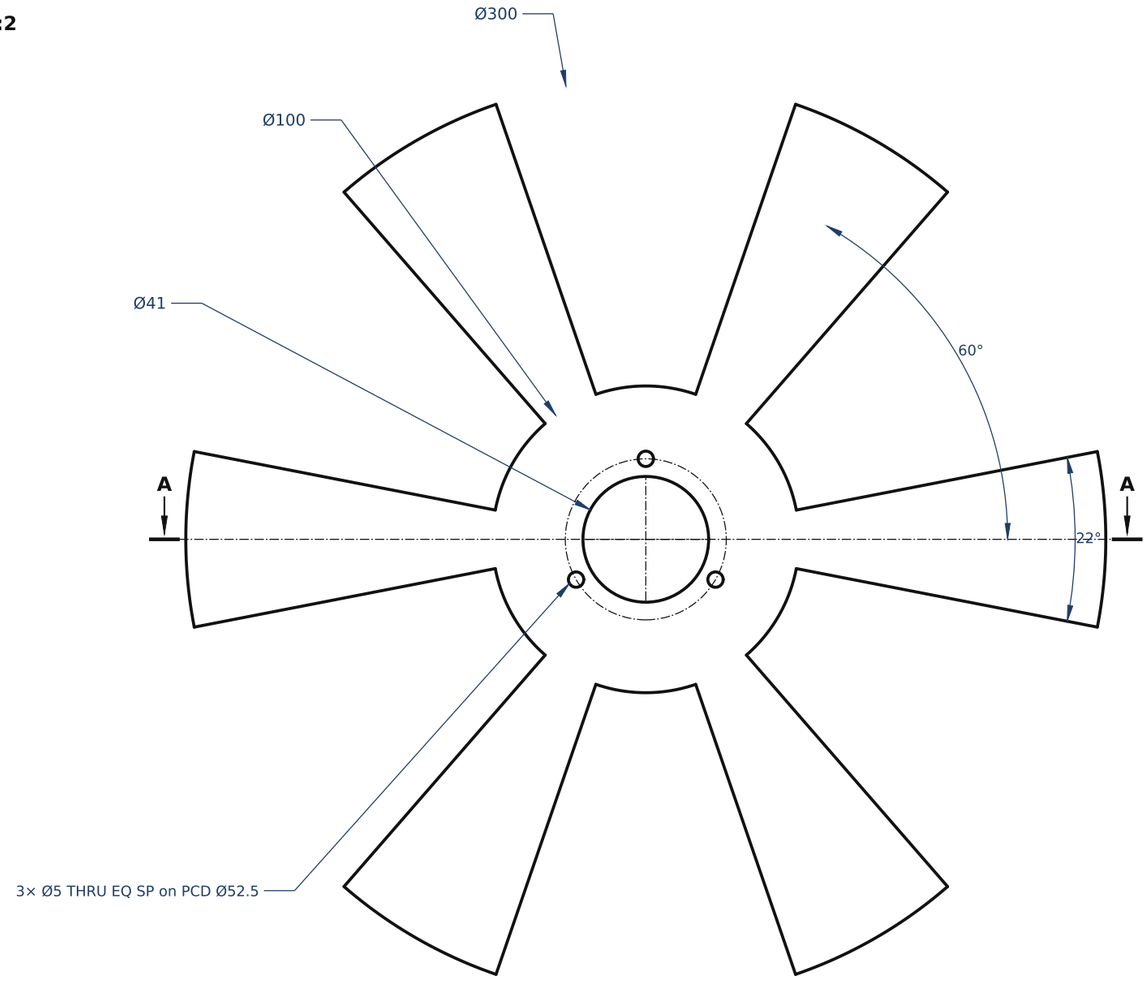
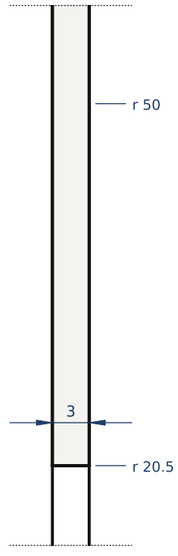
**PLAN 1:2**




**SECTION A–A 2:1**

(its part from r 14 to 58)



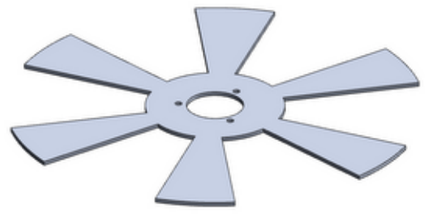

**NOTES**

1 6 blades of 22° on a 60° pitch, r 50-150, on the hub ring r 20.5-50 (node 1 / 4).
2 Three dowel holes Ø5 H7 at r 26.25 (90°, 210°, 330°) for the stack's alignment.
3 Every rim a full round R1.5 (t / 2), burr-free, Ra ≤ 0.8 µm: the record's rims are full rounds on a handled surface (Peek m 0.85, sim/vane-matrix-findings.md §2). Clean with IPA after the last operation; handle with gloves.
4 Flatness 0.10 over the whole plate; parallelism of the faces 0.05: the 6 mm working gaps (sim/stack_sizing.py).
5 Laser- or waterjet-cut, then the rims rounded (CNC or tumble and hand-finish).
6 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

**REVISIONS**

| Rev | Date | Description |
|---|---|---|
| A | 2026-10-11 | First issue, draft for quotation |

| | |
|---|---|
| status | PROPOSED |
| qty per machine | 10 |
| used in | CAP-600 |
| source | sim/stack_sizing.py (the record's vane); sim/doubler_caps.py (the dowels) |
| node | 1 (C1) / 4 (C2) |
| holds | 13.2 kV pk to the stator vanes |
| mass each | 0.239 kg |



3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

**Rotor vane, C1 / C2 (r03-r11)**

Drawing no. **DCCREG-CAP-601**

Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), plate 3.0

| | | |
|---|---|---|
| Mass: 0.239 kg | Qty per machine: 10 | Rev A Sheet 33 of 103 A3 |
| Scale: 1:2, 2:1 | Tolerances: ISO 2768-mK | Date: 2026-10-11 |
| Drawn: generated by docs/make_drawing_set.py | Checked: — Approved: — | **PROPOSED · DRAFT** |