

PLAN 1:5

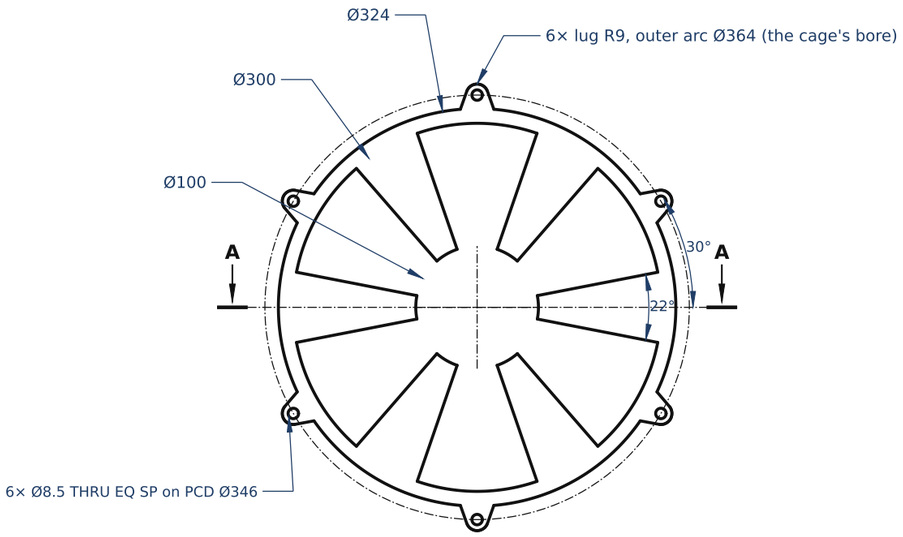

SECTION A–A 2:1

(its part from r 136 to 166)

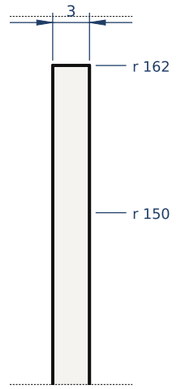


NOTES

1 6 blades of 22° on a 60° pitch, r 50-150, on the ring r 150-162 (REF, the counter-rotor).
2 Six lugs at 30° + 60° k to r 182 (the cage's bore), each with a Ø8.5 hole at r 173 for a tie rod.
3 The lugs' outer arcs fit the cage's bore Ø364 H9: they locate the vane.
4 Every rim a full round R1.5 (t / 2), burr-free, Ra ≤ 0.8 µm: the record's rims are full rounds on a handled surface (Peek m 0.85, sim/vane-matrix-findings.md §2). Clean with IPA after the last operation; handle with gloves.
5 Flatness 0.10 over the whole plate; parallelism of the faces 0.05: the 6 mm working gaps (sim/stack_sizing.py).
6 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	12
used in	CAP-600
source	sim/stack_sizing.py (the record's vane, its ring r 150-162); sim/doubler_caps.py (the lugs)
node	REF (the counter-rotor)
mass each	0.298 kg

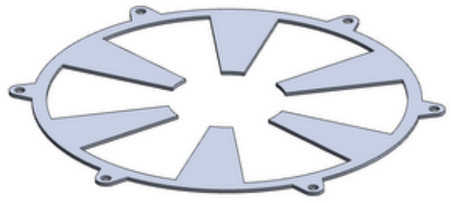

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

Stator vane with its six lugs, C1 / C2

Drawing no. **DCCREG-CAP-603**

Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), plate 3.0

Mass: 0.298 kg	Qty per machine: 12	Rev A Sheet 35 of 103 A3
Scale: 1:5, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**