

SECTION A–A 2:1



VIEW B 2:1




NOTES

1. -01: length 15.00 ±0.02 between two stator vanes (60 per machine); -02: length 12.00 ±0.02 from the last vane to the spider (12 per machine). The view draws -01.
2. Faces square to the bore within 0.02.
3. G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	72
used in	CAP-600
source	sim/doubler_caps.py SSP_D
mass each	0.004 kg

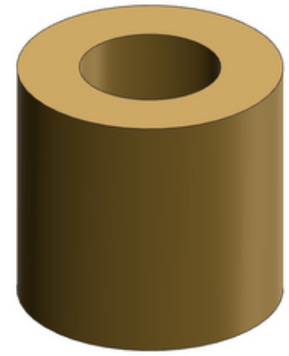

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

Stator spacer tube, G10, Ø16 / 8.5 (-01 × 15, -02 × 12)		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube		**DCCREG-CAP-606**
Mass: 0.004 kg	Qty per machine: 72	Rev A Sheet 38 of 103 A3
Scale: 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**