

SECTION A–A 5:1

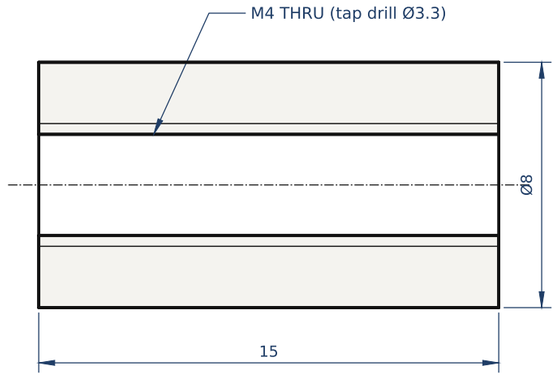

VIEW B 2:1



NOTES

1. -01: 15.00 ±0.02 long (24 per machine); -02: 6.00 ±0.02 long (6 per machine); both M4 tapped through, 6H (a female-female spacer). The view draws -01.
2. Ends square to the thread within 0.02; all edges rounded R1 (an HV conductor 11 mm from the other comb).
3. The model's solid is plain; the tapped bore is the drawing's.
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	30
used in	CAP-610
source	sim/doubler_caps.py POST_D (M4 female)
mass each	0.00169 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: Ca / Cb

Post spacer, Al, Ø8, M4 (-01 × 15, -02 × 6)

Drawing no. **DCCREG-CAP-616**

Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), round bar

Mass: 0.00169 kg	Qty per machine: 30	Rev A Sheet 46 of 103 A3
Scale: 5:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**