

SECTION A–A 2:1

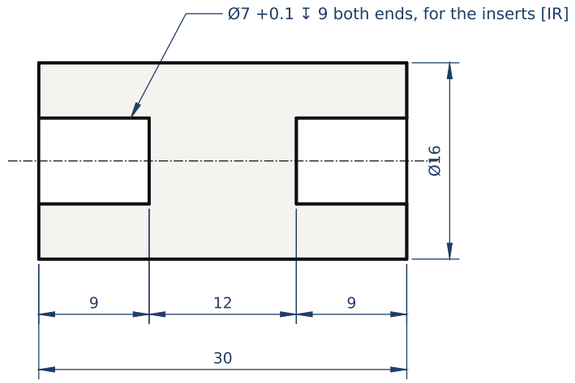

VIEW B 2:1



NOTES

1. A custom part for a technical-ceramics maker: no catalogue standoff of Ø16 × 30 with M4 threads was found (Abbatron's glazed standoffs run 1/2-5/8 in with 6-32 / 8-32 threads).
2. Node 2 (≤ 4.5 kV) to REF: 30 mm of glazed steatite against 6.5 mm needed (inorganic, creepage = clearance).
3. Inserts: brass M4, Ø7 × 9, thread 8 deep [IR], cemented in the bores flush ±0.05 and square to the axis within 0.05; the end faces lapped flat. 12 mm of solid steatite stays between the inserts.
4. Alternate: virgin PTFE, the same envelope, brass inserts pressed in (it creeps; check after a month).
5. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	6
used in	CAP-610
source	sim/doubler_caps.py STANDOFF; sim/doubler-caps-findings.md (no catalogue part at this size)
mass each	0.0149 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: Ca / Cb

Standoff, glazed steatite, Ø16 × 30, M4		Drawing no.
Material: steatite C 221 (IEC 60672-3), glazed all over but the end faces; M4 brass		**DCCREG-CAP-617**
Mass: 0.0149 kg	Qty per machine: 6	Rev A Sheet 47 of 103 A3
Scale: 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**