


**TOP**

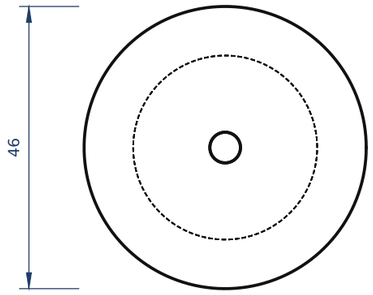


**FRONT**

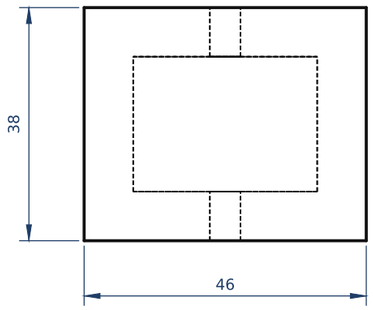


**RIGHT**




**NOTES**

1 The part: 180 pF / 30 kV, class 1 HV ceramic (or PP / PTFE film), screw terminals.
2 8 mm of void-free silicone over the part all round (13.2 kV class, sim/parts-first-cut-findings.md §5): vacuum-cast in a mould to the envelope drawn, then pressure-cured.
3 The envelope is the layout's [RH]; take the real part's from its source-control sheet and keep the 8 mm.
4 The leads leave the potting where drawn; their insulation (or the potting) unbroken to the deck's pour.
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

**REVISIONS**

| Rev | Date | Description |
|---|---|---|
| A | 2026-10-11 | First issue, draft for quotation |

| | |
|---|---|
| status | PROPOSED |
| qty per machine | 4 |
| used in | DCK-500 |
| source | sim/multiplier_layout.py PART, POT (the envelopes [RH]); sim/parts-first-cut-findings.md §5 |
| parts | C3-C6 |
| body | Ø30 × 22 |
| silicone each | 0.0544 kg: the pour as drawn at 1.15 g/cm³ (sim/bridge_ring_bearings.py RHO_LAYOUT); the part's own mass on its sheet |
| mass each | — |

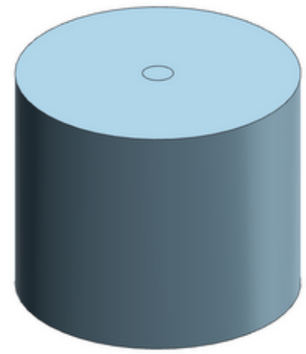

3-D view (axonometric, not to scale)

DCCREG turbine · deck A / deck B

**Module: capacitor C3-C6, potted**

Drawing no. **DCCREG-DCK-506**

Material: C3-C6: the part (P-003) in silicone, two-part addition cure, vacuum-degass

| | | |
|---|---|---|
| Mass: — | Qty per machine: 4 | Rev A Sheet 28 of 103 A3 |
| Scale: 1:1 | Tolerances: ISO 2768-mK | Date: 2026-10-11 |
| Drawn: generated by docs/make_drawing_set.py | Checked: — Approved: — | **PROPOSED · DRAFT** |