

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	DCK-500
source	sim/multiplier_layout.py PART, POT (the envelopes [RH]); sim/parts-first-cut-findings.md §5
parts	Z1, Z4
body	34 × 134 × 20
silicone each	0.189 kg: the pour as drawn at 1.15 g/cm³ (sim/bridge_ring_bearings.py RHO_LAYOUT); the part's own mass on its sheet
mass each	—


TOP

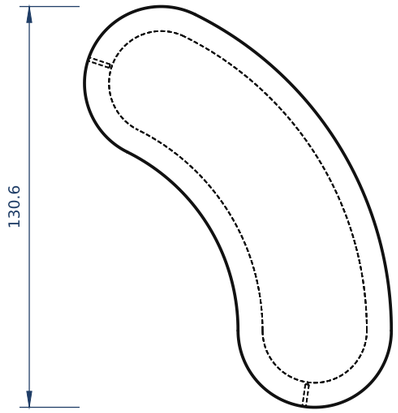


FRONT

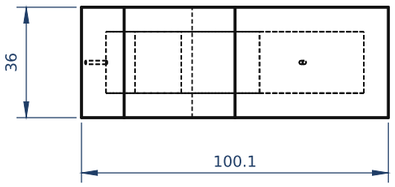

RIGHT

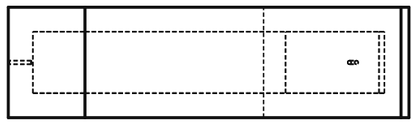

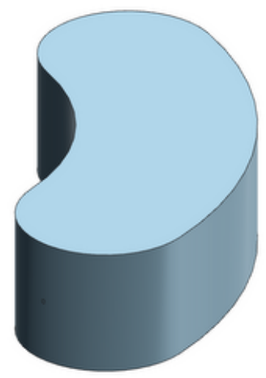

3-D view (axonometric, not to scale)

NOTES

1 The part: the clamp string: 66 x 1.5KE200A in a meander, its HV and REF ends at opposite ends.
2 8 mm of void-free silicone over the part all round (13.2 kV class, sim/parts-first-cut-findings.md §5): vacuum-cast in a mould to the envelope drawn, then pressure-cured.
3 The envelope is the layout's [RH]; take the real part's from its source-control sheet and keep the 8 mm.
4 The leads leave the potting where drawn; their insulation (or the potting) unbroken to the deck's pour.
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

DCCREG turbine · deck A / deck B

Module: clamp string Z1 / Z4, potted		Drawing no.
Material: Z1, Z4: the part (P-006) in silicone, two-part addition cure, vacuum-degas		**DCCREG-DCK-509**
Mass: —	Qty per machine: 2	Rev A Sheet 31 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**