

PLAN 1:1

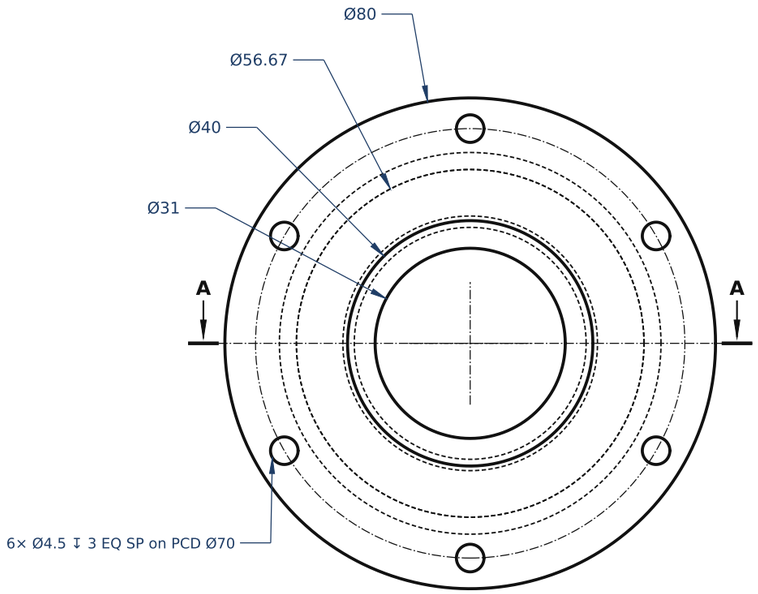

SECTION A–A 2:1


(its part from r 13 to 42)

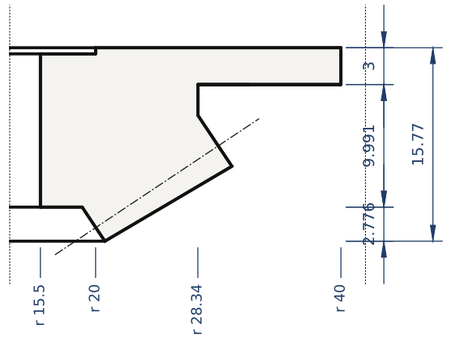

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	1
used in	DRV-100
source	docs/drive-gear-belt.md §5; sim/unmodelled_parts.py side_gear
gear	straight bevel, 90° shaft angle; the teeth's proportions at the heel (h_a = m, h_f = 1.25 m)
teeth, module	z 30, m 2 at the heel; pressure angle 20°
pitch angle δ	56.31°; face 59.48°, root 52.34°
pitch Ø / tip Ø	60.00 / 62.22 at the heel
cone distance, face	R_e 36.06; b 12
mounting distance	28.00 ± 0.05, the cone's apex to the back face
mates with	DRV-103 pinion z 20, × 3
backlash	j_n 0.10-0.15, set at assembly (docs/drive-gear-belt.md §5)
accuracy	ISO 17485 grade 8 class (AGMA Q 8, as sized) [IR]
flange	Ø80 × 3, 6 × Ø4.5 on PCD Ø70
mass each	0.226 kg

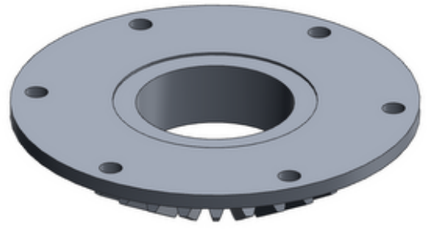

3-D view (axonometric, not to scale)

NOTES

1 The same teeth as DRV-101 (§5: two identical side gears), with a back flange Ø80 × 3 [IR]: bolted under the counter-rotor's hub (DRV-108) by six M4 (ISO 4762, A4) on PCD Ø70 at 0° / 60° …, between the pinions.
2 Its back face holds the gear-end 6205-2Z's outer ring in the hub's seat; the relief Ø40 × 0.5 keeps it off the inner ring. Bore Ø31: 1.5 mm round the shaft's spacer tube (Ø28), which turns at 1200 rpm against it.
3 The teeth as the 3-D view and the model draw them: the heel's involute profile on the back cone (Tredgold), the flanks straight to the apex, each tooth thinned 0.064 mm for the backlash (sim/unmodelled_parts.py); the section and the plan draw the blank, as a gear drawing does.
4 Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

DCCREG turbine · the drive: the reverser

Side gear, the counter-rotor's, z 30 m 2, flanged		Drawing no.
Material: austenitic stainless 1.4305 (303), non-magnetic, as the shaft		**DCCREG-DRV-102**
Mass: 0.226 kg	Qty per machine: 1	Rev A Sheet 74 of 103 A3
Scale: 1:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**