

SECTION A–A 5:1

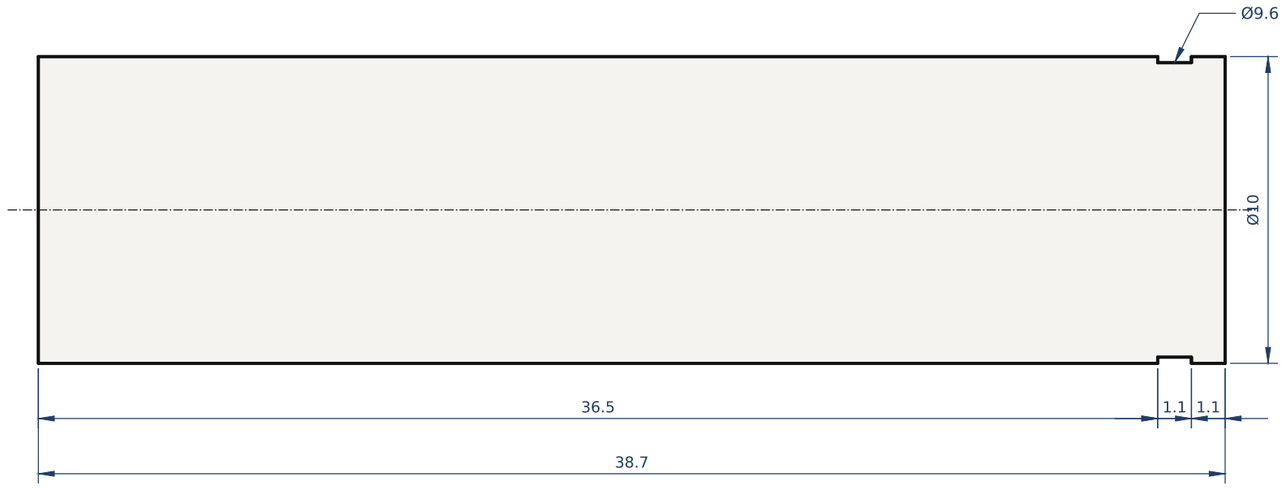

VIEW B 2:1




NOTES

1. Ø10 h6 over the pinion's seat (pressed) and the two 6000-2Z; the circlip's groove DIN 471 for 10 × 1 (Ø9.6 × 1.1) at the outer end [IR].
2. Bending at the driver's limit 14 MPa, the mesh 17 mm outboard of the inner bearing (sim/unmodelled_parts_results.json pinion_bearings).
3. Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	3
used in	DRV-100
source	docs/drive-gear-belt.md §5 (Ø10, 2 × 6000-2Z)
mass each	0.024 kg

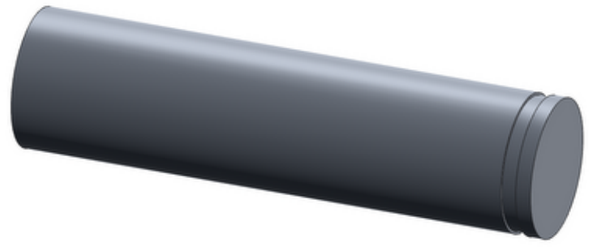

3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the reverser

Stub shaft, Ø10, the pinion's		Drawing no.
Material: austenitic stainless 1.4305 (303), non-magnetic, as the shaft		**DCCREG-DRV-104**
Mass: 0.024 kg	Qty per machine: 3	Rev A Sheet 76 of 103 A3
Scale: 5:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**