

SECTION A–A 1:1

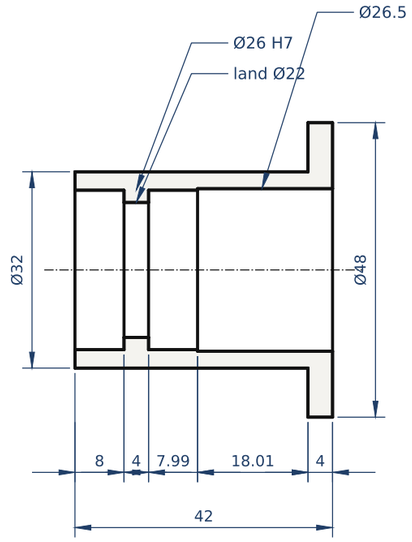

VIEW B 1:2

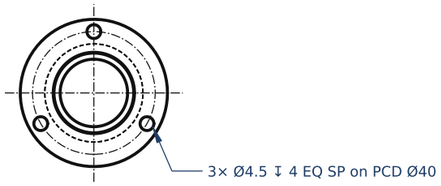


NOTES

1. The two 6000-2Z in Ø26 H7 seats either side of the 4 mm land; the inner one pressed from the inner end, the outer one from outside; Ø32 g6 in the case's bore Ø32 H7.
2. The flange on the case's boss face (r 76): three M4 (ISO 4762, A4) on PCD Ø40; shims under it set the backlash j_n 0.10-0.15 (§5).
3. The bearings 12 mm apart (the case's arithmetic, §8): the inner one takes 40 N steady, 195 N at the driver's limit, a static safety of 10 (the first cut's statics: 16 mm, 141 N, 14).
4. Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
5. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	3
used in	DRV-100
source	docs/drive-gear-belt.md §5, §8 (the case's arithmetic)
mass each	0.0417 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the reverser

Cartridge sleeve, the pinion's two 6000-2Z

Drawing no. **DCCREG-DRV-105**

Material: Al EN AW-6082-T6

Mass: 0.0417 kg	Qty per machine: 3	Rev A Sheet 77 of 103 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**