

PLAN 1:2

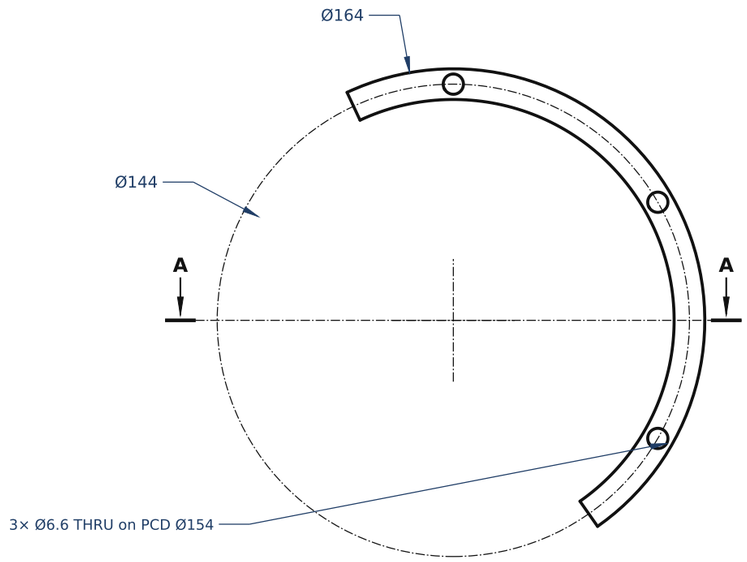

SECTION A–A 2:1

(its part from r 66 to 86)

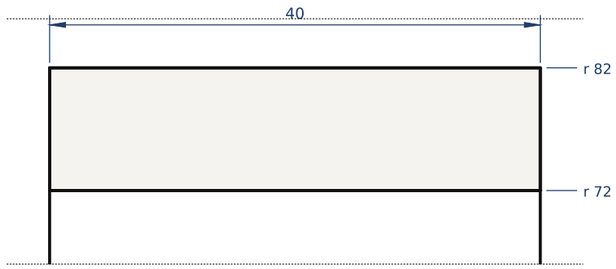

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	1
used in	DRV-100
source	docs/drive-gear-belt.md §8; sim/unmodelled_parts.py bell
mass each	0.236 kg

NOTES

1 Ø164 / Ø144 × 40 over 170°, open toward the motor so the belt passes and can be fitted without lifting the machine [IR]. The first cut's bell (r 64-72) would cut the belt's land (r 63.1-64.8).
2 Clamped between the base plate and the case's flange by three M6 × 60 (ISO 4762, A4) from below through Ø6.6 at 120° / 180° / 240° (drawn turned 210°, so the section misses a hole).
3 It clears the 80T pulley by 8.9 mm and the belt by 7.2 mm (sim/unmodelled_parts_results.json).
4 Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.



3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the reverser

Bell, a C under the case floor

Drawing no. **DCCREG-DRV-107**

Material: Al EN AW-6082-T6		
Mass: 0.236 kg	Qty per machine: 1	Rev A Sheet 79 of 103 A3
Scale: 1:2, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**