

PLAN 1:1

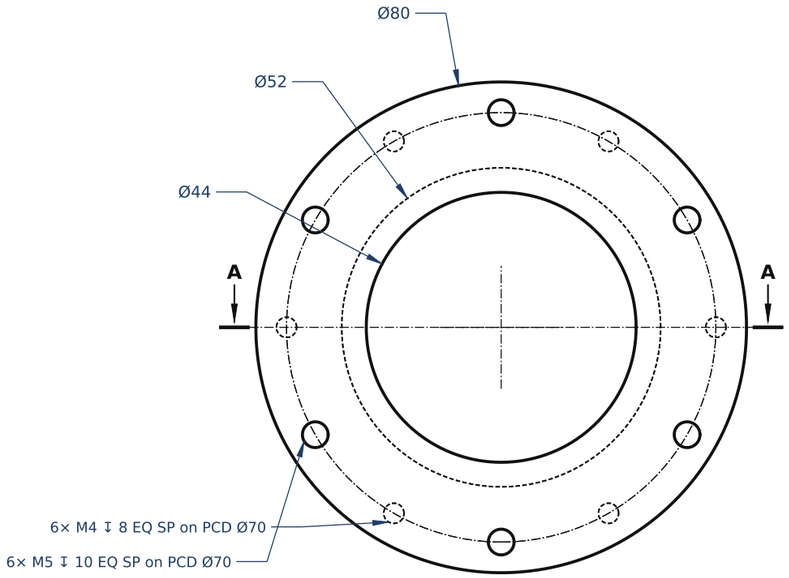

SECTION A–A 2:1

(its part from r 0 to 41)

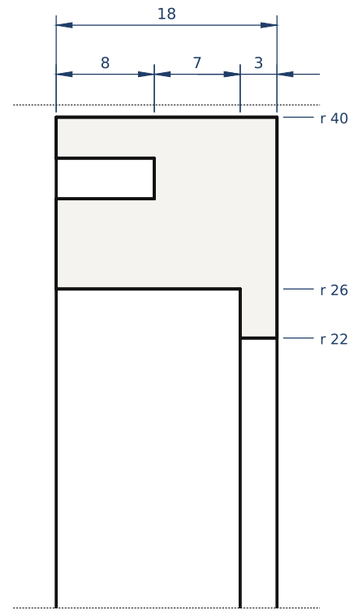


NOTES

1. z −8 to 10 (§8): the gear-end 6205-2Z in a seat Ø52 H7 × 15 open below, under a lip Ø44 that rests on its outer ring, so the counter-rotor's 350 N goes through it into the shaft (§5) [IR: the first cut drew the lip below, which would not carry the weight].
2. Six M5 × 10 deep from the top on PCD Ø70 (30° / 90° …) for the end disc (DRV-109); six M4 × 8 deep from below on PCD Ø70 (0° / 60° …) for the side gear's flange (DRV-102).
3. A metal island at the shaft's potential: the G10 disc insulates it from the counter-rotor's REF parts (§5).
4. Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
5. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	1
used in	DRV-100
source	docs/drive-gear-belt.md §5, §8; sim/unmodelled_parts.py cr_hub
mass each	0.143 kg

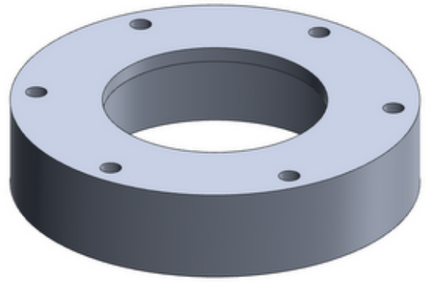

3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the reverser

Counter-rotor hub, the gear-end bearing's

Drawing no. **DCCREG-DRV-108**

Material: Al EN AW-6082-T6

Mass: 0.143 kg	Qty per machine: 1	Rev A Sheet 80 of 103 A3
Scale: 1:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**