

PLAN 1:2

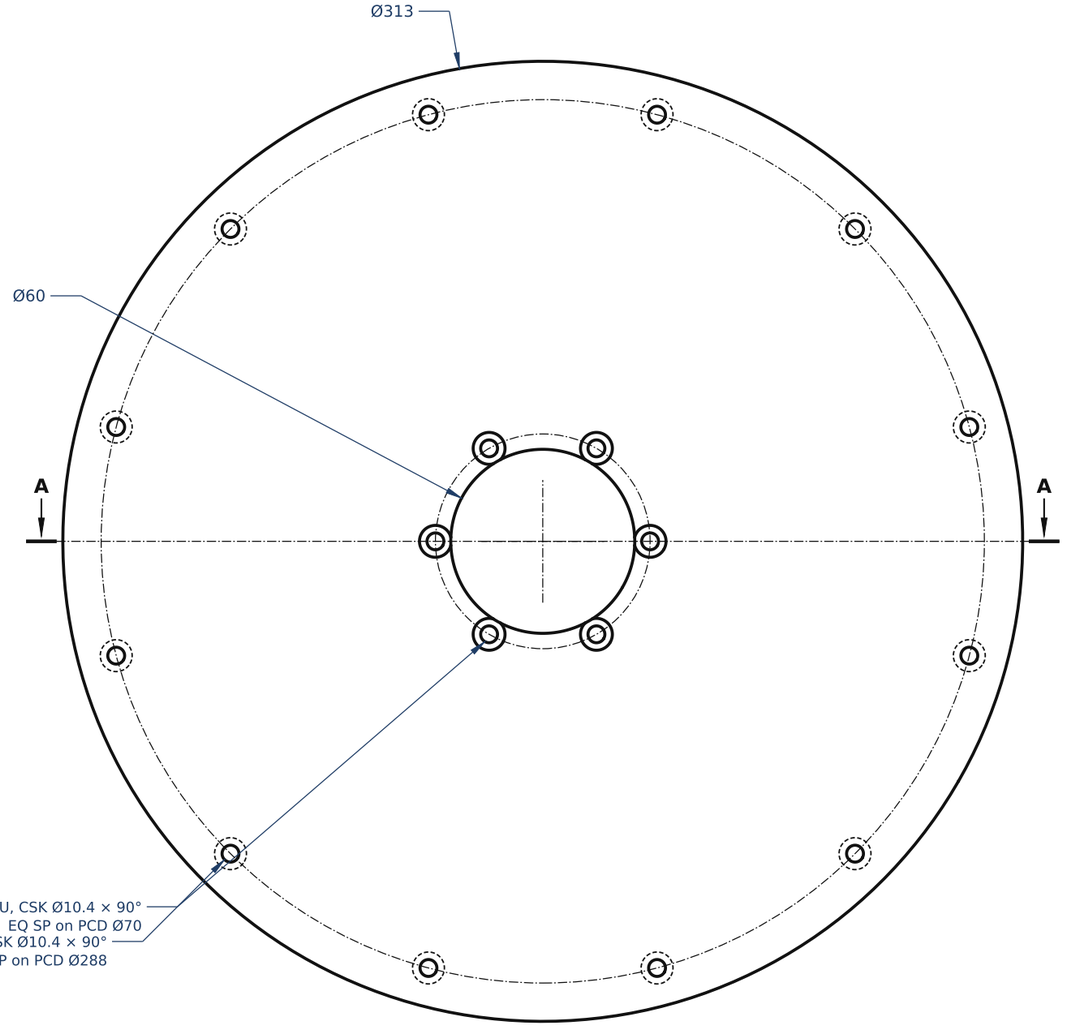

SECTION A–A 2:1

(its part from r 25 to 45)




REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	1
used in	DRV-100
source	docs/drive-gear-belt.md §5 (the bottom spider re-purposed)
mass each	1.36 kg

NOTES

1 G10, 10 mm, r 30-156.5 (§5: the record's bottom frame spider re-purposed): it closes bridge ring A's end and carries the hub [IR: the bolting].
2 Twelve M5 countersunk from below on PCD Ø288 into threaded inserts in bridge ring A's end face; six M5 countersunk from the top on PCD Ø70 into the hub (drawn turned 30°: a hub screw at 0°).
3 G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4 Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

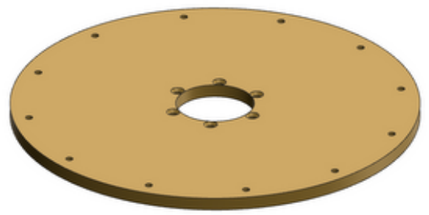

3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the reverser

End disc, G10, the counter-rotor's		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), plate 10		**DCCREG-DRV-109**
Mass: 1.36 kg	Qty per machine: 1	Rev A Sheet 81 of 103 A3
Scale: 1:2, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**