
SECTION A–A through the shaft's and the motor's axes 1:2

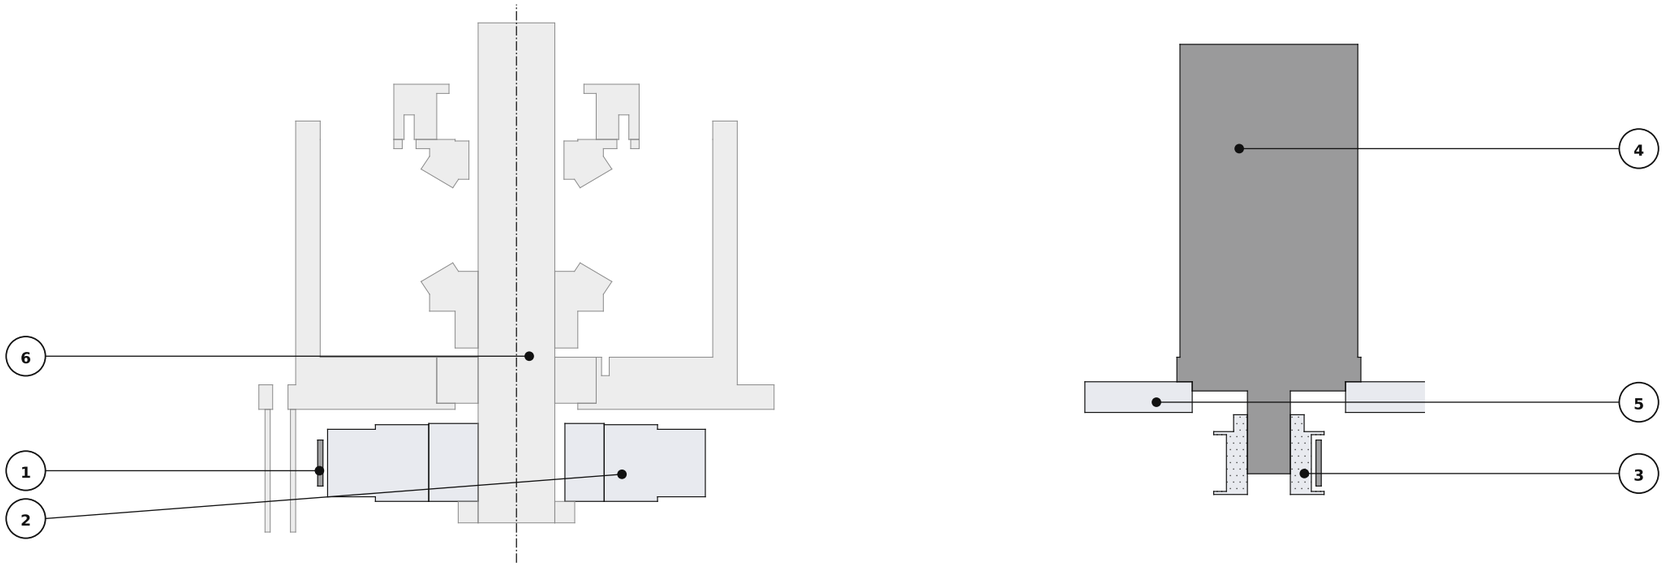

NOTES


1. Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
2. HTD 5M, 15 wide, 750 long (150 teeth); 20T → 80T, 4 : 1: the motor at 2400 rpm for 600 rpm; centres 245.4 mm, the wrap on the 20T 158° (8 teeth in mesh), the belt at 4.0 m/s (§6).
3. Tension 46 N static per strand by the motor plate's slots; the hub load 90 N (153 N at the limit) into the locating bearing (§6, §7). The pitch length at these centres 750.02 mm (sim/unmodelled_parts_results.json).
4. The motor stands on its plate above the 20T pulley; the plate on a bracket of the frame (the frame is not drawn: placeholders, §9).

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	P-013	belt Gates 750-5M-15	—	1
2	P-014	pulley 80T and taper bush	—	1 + 1
3	P-014	pulley 20T	—	1
4	P-015	motor, 200 W	—	1
5	DRV-121	motor plate	Al 6082	1
6	DRV-100	the reverser (for reference)	—	ref.

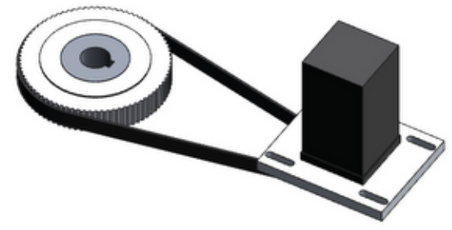

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

DCCREG turbine · the drive

The belt drive: pulleys, belt, motor on its plate		Drawing no.
Material:		**DCCREG-DRV-120**
Mass: —	Qty per machine: 1	Rev A Sheet 82 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**