

TOP

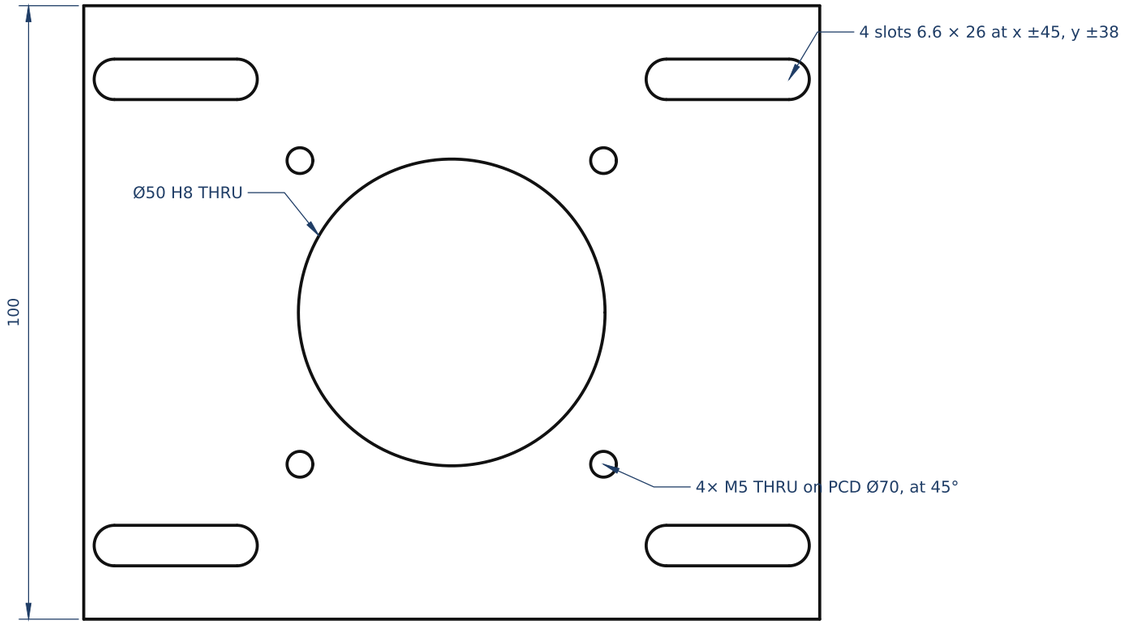

FRONT

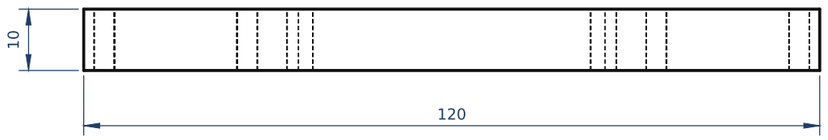


NOTES

1 120 × 100 × 10: the motor's spigot in Ø50 H8, its flange on four M5 at PCD Ø70 (45°) [IR: the 60 mm frame's class; confirm on the motor's drawing, P-015].
2 Four slots 6.6 × 26 for M6 to the frame's bracket: 20 mm of travel along the belt's line for the tension.
3 Status: the first cut of docs/drive-gear-belt.md on the record's 940 mm stack-up (z from the record's bottom end-bearing slot); the ledger asks for the drive to be re-cut on the layout (§6, item 71). PROPOSED.
4 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut, on the record's 940 mm stack-up: to re-cut on the layout (ledger §6, item 71)
qty per machine	1
used in	DRV-120
source	docs/drive-gear-belt.md §6, §9 (the motor plate with tensioning slots)
mass each	0.252 kg

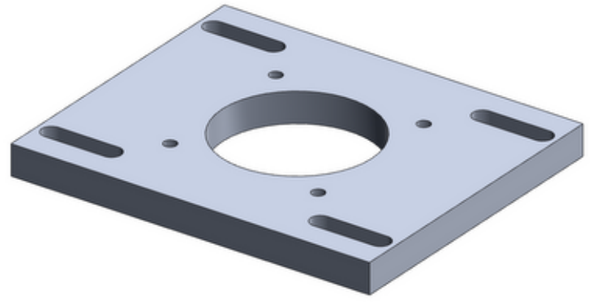

3-D view (axonometric, not to scale)

DCCREG turbine · the drive: the belt

Motor plate, tensioning slots		Drawing no.
Material: Al EN AW-6082-T6, plate 10		**DCCREG-DRV-121**
Mass: 0.252 kg	Qty per machine: 1	Rev A Sheet 83 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**