

SECTION A–A 1:1

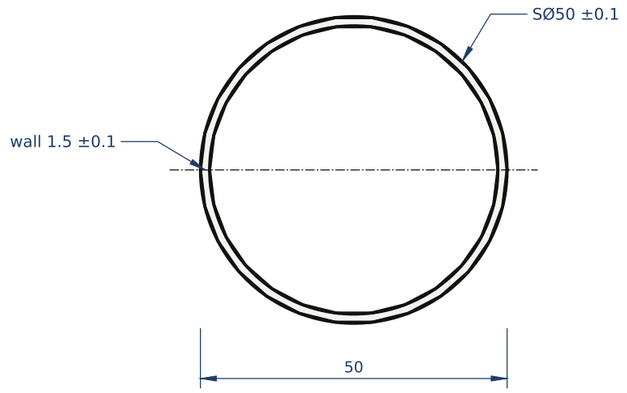

VIEW B 1:2




NOTES

1. A sphere, OD 50 ±0.1, wall 1.5 ±0.1, evacuated and sealed: the seal-off tip ground flush at a pole (the designer's, to agree with the glassblower).
2. Inside: vacuum ≤ 1e-4 mbar. The shell's stress under vacuum is about 0.8 MPa (presets/hub-locked.json).
3. The outer surface carries rings A and B (HUB-201): keep it clean and free of scratches.
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	LOCKED
qty per machine	1
used in	HUB-200
source	presets/hub-locked.json vessel, vessel_wall
mass each	0.0247 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the hub

Vessel, borosilicate, Ø50 × 1.5		Drawing no.
Material: borosilicate glass 3.3 (DIN ISO 3585), annealed		**DCCREG-HUB-202**
Mass: 0.0247 kg	Qty per machine: 1	Rev A Sheet 5 of 103 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**