

SECTION A–A 1:1

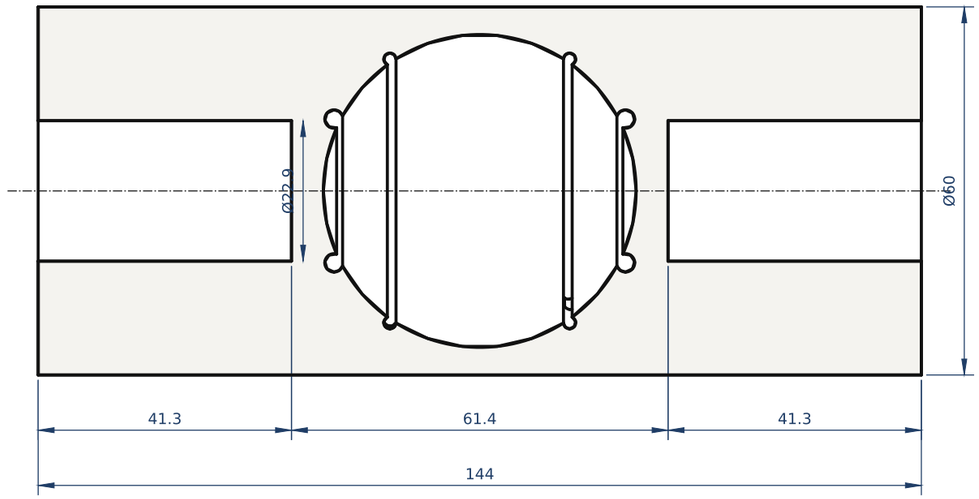

VIEW B 1:2



NOTES

1. Its role and material are DECIDED (the designer, 2026-10-09); its grooves and dimensions are the first cut of docs/rings-design.md §2 (PROPOSED).
2. The pocket holds the vessel with 0.5 mm all round for the gel, with the beads' grooves; the AH seats at |z| 25-30.7; the rings' lead channels as drawn.
3. Anneal after rough machining; finish-machine the pocket and the seats; keep HV surface paths off it (its CTI is 150, group IIIb: sim/parts-first-cut-findings.md §4).
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	1
used in	HUB-200
source	presets/hub-locked.json retainer; docs/rings-design.md §2
mass each	0.392 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the hub

Retainer, PEEK		Drawing no.
Material: PEEK, unfilled (natural, Victrex 450G class), machined from annealed stock		**DCCREG-HUB-203**
Mass: 0.392 kg	Qty per machine: 1	Rev A Sheet 6 of 103 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**