

SECTION A–A 1:1

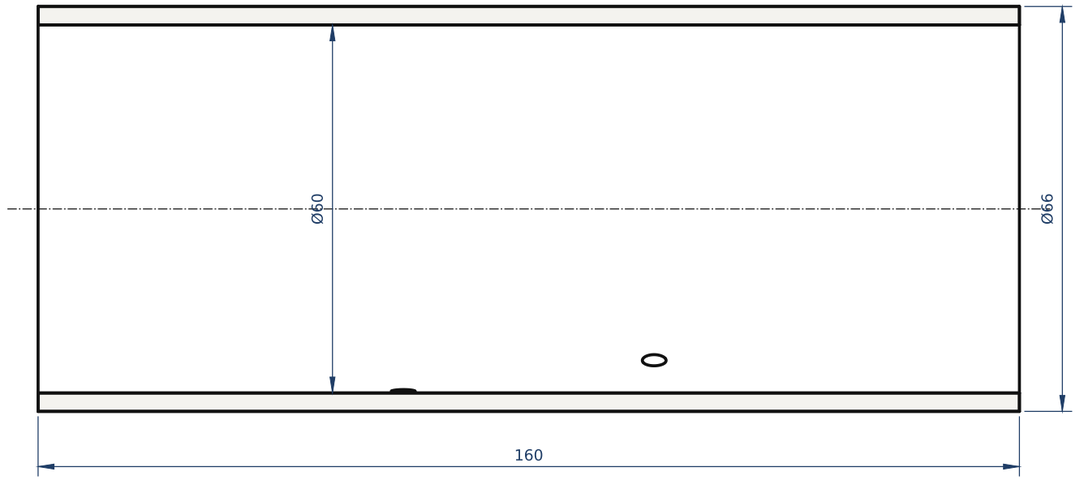

VIEW B 1:2



NOTES

1. A straight tube, Ø60 / Ø66, |z| ≤ 80: bonded over the PEEK retainer and over both shaft flanges (PROPOSED first cut, presets/hub-locked.json).
2. Outside the retainer only: never against the glass or the rings (DECIDED).
3. G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	1
used in	HUB-200
source	presets/hub-locked.json shaft_coupler; docs/rings-design.md §2
mass each	0.176 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the hub

Shaft coupler, G10 tube 60 / 66		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube		**DCCREG-HUB-204**
Mass: 0.176 kg	Qty per machine: 1	Rev A Sheet 7 of 103 A3
Scale: 1:1, 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**