SECTION A–A 2:1

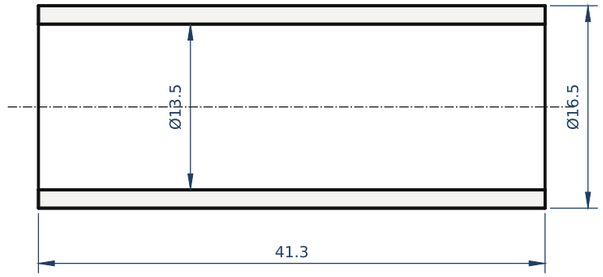

VIEW B 2:1



NOTES

1 ID 13.5, OD 16.5 over the core (Fair-Rite 4077484611, Ø12.3, P-007); side A's and side B's are the same part.
2 G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	LOCKED
qty per machine	2
used in	HUB-200
source	presets/hub-locked.json AH (presets/electromagnets-RA.json AH_former)
mass each	0.0054 kg

3-D view (axonometric, not to scale)

DCCREG turbine · the hub

AH former, G-10		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2), tube		**DCCREG-HUB-205**
Mass: 0.0054 kg	Qty per machine: 2	Rev A Sheet 8 of 103 A3
Scale: 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**