
ENVELOPE (as the model draws it) 1:2

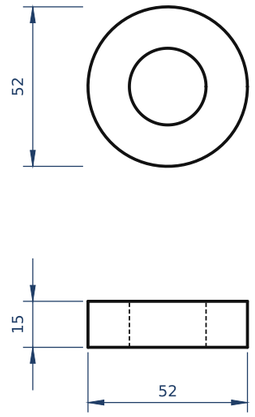

specification	value
designation	SKF 6205-2Z: SKF Explorer deep groove ball bearing, single row; a sheet-steel shield each side (2Z, non-contact); normal radial internal clearance (CN); greased for life
bore / OD / width	25 / 52 / 15 mm
ratings	C 14.8 kN, C0 7.8 kN, Pu 0.335 kN
speeds	reference 28000 r/min, limiting 14000 r/min (2Z)
accuracy	running ISO P5 (SKF Explorer bearings up to 52 mm outside diameter; the 6205's is 52); dimensions ISO P6, the width to 0 / -60 um
abutments	da min 30.6, Da max 46.4 mm
alternates	Schaeffler (FAG) 6205-C-2Z; NSK 6205ZZ
where	the Ca|reluctance pair, the end pair (frame) and the bridge-ring pair: six per machine


NOTES

1 Catalogue data as a web search rendered the distributors' listings and SKF's brochure (2026-10-11): re-read the maker's current page before ordering (sim/bridge-ring-bearings-findings.md §1).
2 Fits: shaft Ø25 k5, housings Ø52 H7; the axial spring preload 100 N on the floating bearings.
3 Sources: ratings, speeds, mass, abutments: https://www.simplybearings.co.uk/products/6205-2z-skf; Pu, reference speed, kr, f0: https://www.simplybearings.co.uk/products/6205-skf; limiting speed 14 000 r/min (2Z): https://uk.rs-online.com/web/p/ball-bearings/2868038

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	6
used in	BRG-800/-801/-802
source	sim/bridge_ring_bearings.py PART (catalogue data, 2026-10-11)

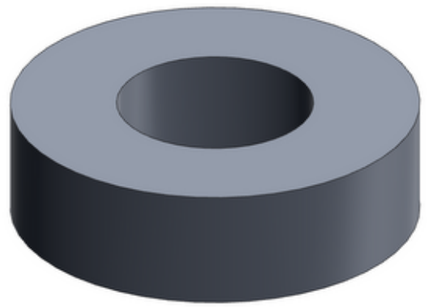

3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Bearing, SKF 6205-2Z

Drawing no. **DCCREG-P-001**

Material: deep groove ball bearing, 25 / 52 / 15, shielded both sides

Mass: 0.13 kg	Qty per machine: 6	Rev A Sheet 85 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**