
ENVELOPE (as the model draws it) 1:2

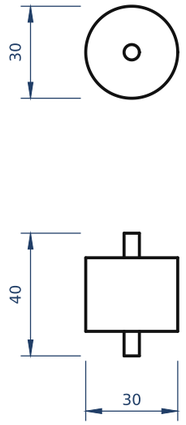

specification	value
value	100 pF ±20 %
rating	40 kV DC; class 1, N4700; -30 to +85 °C
candidate	Vishay 715C40KTT10, Ø21 × 31 mm (RS listing)
where	C7 / C8 (30 kV duty) and Csa / Csb (40 kV): one part for all four
envelope	the layout's Ø30 × 24 (Csa) and Ø25 × 20 (C7 / C8) [RH]; the candidate's 31 mm height makes a 47 mm module standing, 5 mm over the deck's zone: lay it along its lane

NOTES


1 No 100 pF / 30 kV 715C was found; the 40 kV part covers C7 / C8 too.

2 Confirm the terminals' thread and the stock before ordering.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	4
used in	DCK-507, DCK-508
source	Vishay 715C series (RS listings 2101583 / 2101584)



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

HV capacitor, 100 pF / 40 kV, N4700 (Vishay 715C40KTT10)

Drawing no. **DCCREG-P-004**

Material: class 1 ceramic disc (N4700), screw terminals

Mass: —	Qty per machine: 4	Rev A Sheet 88 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**