
ENVELOPE (as the model draws it) 1:5

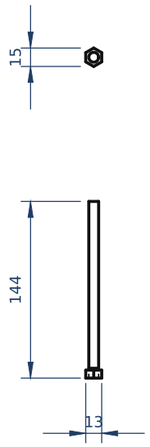

specification	value
size	M8, 136 mm per rod (cut from stock); nuts M8, AF 13 × 6.5
material	glass-fibre reinforced epoxy (electrically insulating, non-magnetic)
candidates	M.M. srl (Italy) glass-fibre epoxy threaded rods, nuts and washers, metric, 2.2 m stock; Reichelt Chemietechnik GFRP threaded rod; Strongwell FIBREBOLT (3/8-16, the imperial alternate)
load	the stator stack's clamp only (tens of N); never a path between two nets (it touches REF metal and G10 only)

NOTES

1 Confirm M8 stock and the nuts' match with the maker; seal the cut ends with epoxy.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	12 rods, 24 nuts
used in	CAP-600, CGE-900
source	sim/doubler_caps.py ROD_D, NUT



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Threaded rod M8 and nuts, glass-epoxy

Drawing no. **DCCREG-P-008**

Material: glass-fibre epoxy (G10 / GFRP) threaded rod and nuts

Mass: —	Qty per machine: 12 rods, 24 nuts	Rev A Sheet 92 of 103 A3
Scale: 1:5	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**