
ENVELOPE (as the model draws it) 1:2

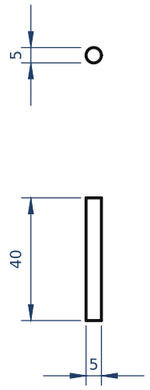

specification	value
conductors	the AH coils to La / Lb, D1*-D4* and the utrons: 8 cores ≥ 0.5 mm² (≤ 3 A rms, the utrons' 1.9 A rms) [IR]
envelope	≤ Ø5 over all, to run in the shaft's 8 mm bore
insulation	PTFE or FEP, 200 °C, ≤ 300 V
candidate	any 8-core PTFE-insulated control cable of ≤ Ø5 (to be chosen)


NOTES

1 The cable's own choice is open; the bore fixes its diameter.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT
qty per machine	2
used in	SHF-300
source	sim/multiplier-layout-findings.md §7; sim/tube_geometry.py LV_R

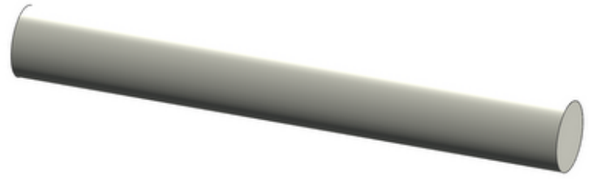

3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

LV cable, the magnetic pump's leads

Drawing no. **DCCREG-P-010**

Material: multi-core LV cable, PTFE / FEP insulated

Mass: —	Qty per machine: 2	Rev A Sheet 94 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**