
ENVELOPE (as the model draws it) 1:1

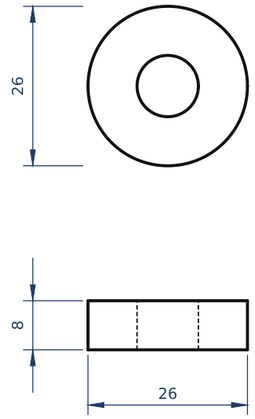

specification	value
designation	SKF 6000-2Z: deep groove ball bearing, shields both sides, greased for life
bore / OD / width	10 / 26 / 8 mm
ratings	C 4.75 kN, C0 1.96 kN (the first cut sized on 4.55 kN)
speeds	reference 67 000 r/min, limiting 34 000 r/min (2Z); here 900 rpm
load	the inner one 40 N steady, 195 N at the driver's limit (sim/unmodelled_parts_results.json)
alternates	FAG 6000-2Z, NSK 6000ZZ, NTN 6000ZZ (the same ISO 15 boundary)
where	two in each pinion's cartridge (DRV-105): six per machine

NOTES


1 Catalogue data as distributors' listings render it (2026-10-11): simplybearings.co.uk 6000-2Z-SKF; rgbautomatyka.pl 6000-2Z SKF. Re-read SKF's current page before ordering.

2 Fits: the stub shaft Ø10 k5, the cartridge's seats Ø26 H7.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT · for the drive's first cut (PROPOSED)
qty per machine	6
used in	DRV-105, DRV-100
source	docs/drive-gear-belt.md §5 (2 × 6000-2Z a pinion)

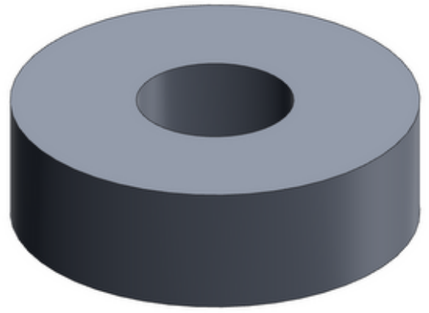

3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Bearing, SKF 6000-2Z

Drawing no. **DCCREG-P-012**

Material: deep groove ball bearing, 10 / 26 / 8, shielded both sides

Mass: 0.019 kg | Qty per machine: 6 | Rev A Sheet 96 of 103 A3

Scale: 1:1 | Tolerances: ISO 2768-mK | Date: 2026-10-11

Drawn: generated by docs/make_drawing_set.py | Checked: — Approved: — | **BOUGHT · SOURCE CONTROL**