
ENVELOPE (as the model draws it) 1:2

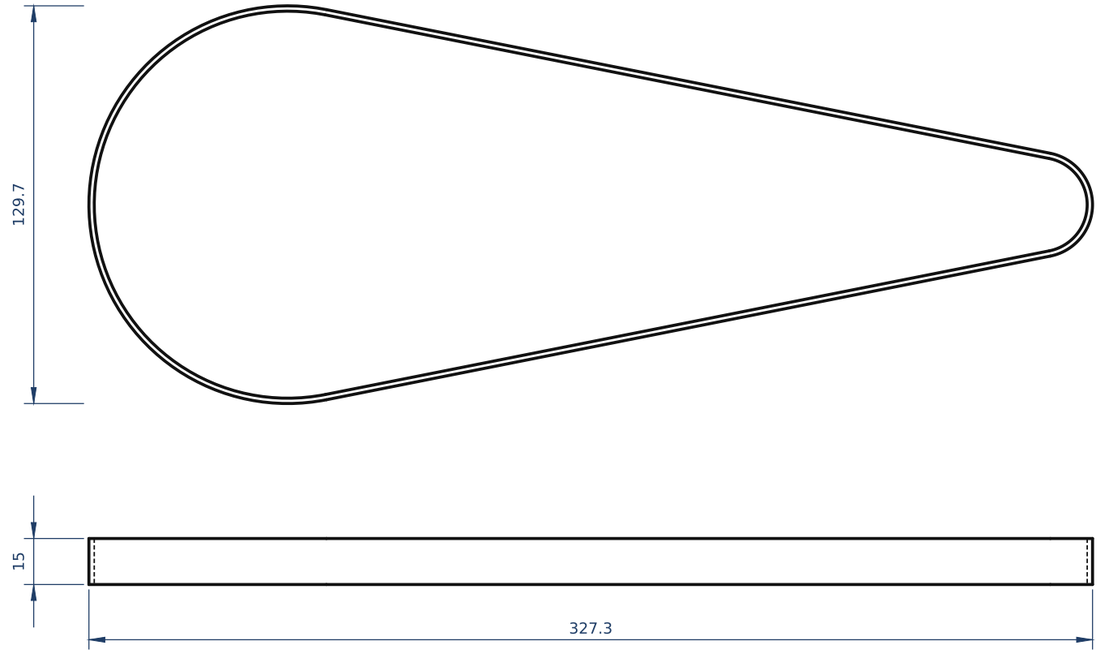

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	BOUGHT · for the drive's first cut (PROPOSED)
qty per machine	1
used in	DRV-120
source	docs/drive-gear-belt.md §6; sim/drive_sizing_results.json belt

specification	value
designation	Gates 750-5M-15 PowerGrip HTD: HTD 5M, 750 mm pitch length, 150 teeth, 15 mm wide
listing	acorn-ind.co.uk, Gates metric timing belts (750-5M-15, EAN 5412571282061)
duty	steady pull 15 N; 60 N at the driver's limit: the 15 mm width needed (§6)
tension	46 N static per strand; the tight side ≤ 76 N against 375 N allowable (§6) [IR]
drawn	its land only, 1.74 mm from the pulleys' tips; the teeth sit in the grooves

NOTES

1 Any HTD 5M 750 × 15 of the same pitch length fits (Optibelt, ContiTech, Megadyne): to choose with the pulleys' maker.



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Timing belt, Gates 750-5M-15 (HTD 5M)

Drawing no. **DCCREG-P-013**

Material: HTD 5M timing belt, neoprene / glass cord

Mass: — | Qty per machine: 1 | Rev A Sheet 97 of 103 A3

Scale: 1:2 | Tolerances: ISO 2768-mK | Date: 2026-10-11

Drawn: generated by docs/make_drawing_set.py | Checked: — Approved: — | **BOUGHT · SOURCE CONTROL**