
ENVELOPE (as the model draws it) 1:2

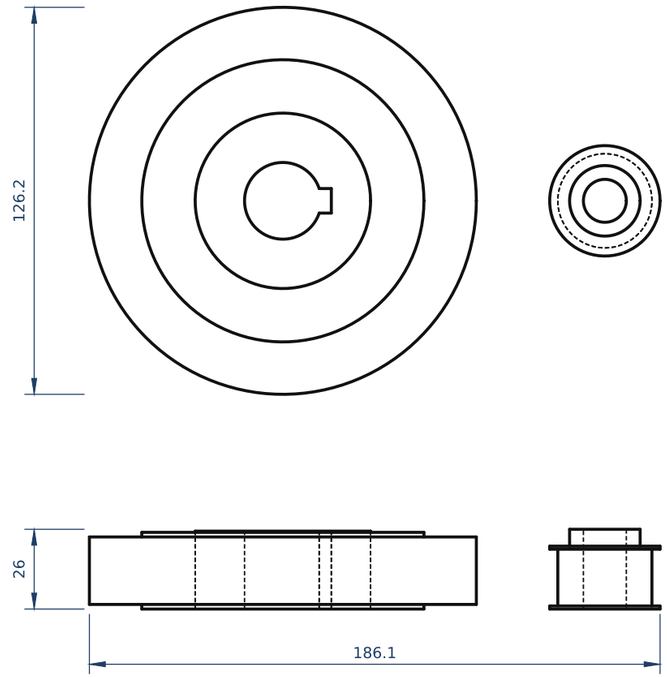

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation


status	BOUGHT · for the drive's first cut (PROPOSED)
qty per machine	1 + 1
used in	DRV-120
source	docs/drive-gear-belt.md §6

specification	value
80T	TL80-5M-15: HTD 5M, 80 teeth, pitch Ø127.32, tip Ø126.18, hub Ø92, F 22, S 25, no flanges, for a taper bush 1610 (beltingonline.com 80-5M-15)
bush	taper bush 1610, bore Ø25 with an 8 mm keyway, on the shaft's drive end
20T	P20-5M-15F: HTD 5M, 20 teeth, pitch Ø31.83, tip Ø30.69, flanges Ø36, hub Ø23, face 20.5, overall 26, pilot bore 6 (ondrives.com); bored Ø14 H7, keyway 5 JS9, an M5 set screw [IR: the motor's shaft]
drawn	the 80T at left with its bush, the 20T at right, its hub up

NOTES

1 The first cut said '24 mm over the flanges' for the 80T: the catalogue's TL80-5M-15 has no flanges and is 25 through; the flanges are on the 20T (§6 to correct).

2 Confirm the bush's bore and the 20T's bore with the shaft and the motor's drawing before ordering.

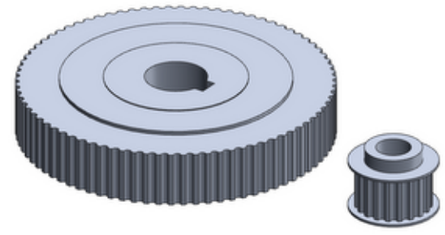

3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Pulleys HTD 5M: 80T taper-bush, 20T flanged		Drawing no.
Material: cast iron / Al pulleys, HTD 5M		**DCCREG-P-014**
Mass: —	Qty per machine: 1 + 1	Rev A Sheet 98 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**