
ENVELOPE (as the model draws it) 1:1

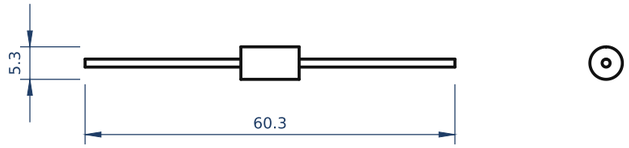

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation


status	BOUGHT · for the first cut (PROPOSED)
qty per machine	2 + 2
used in	the rotor (place OPEN)
source	sim/parts-first-cut-findings.md §2.1, §4

specification	value
D1*, D2*	200 V Schottky, ≥ 3 A (5 A preferred): SMC Diode Solutions SB5200 (200 V, 5 A, VF 0.85 V typ. at 5 A, IFSM 120 A); alternates PANJIT MBR5200 (LCSC C268577), MCC SR5200-TP
their duty	VR 113 / 104 V; IF 0.81 A average, 1.00 A rms, 1.90 A peak: VR × 1.8
D3*, D4*	150 V Schottky (100 V at least), ≥ 3 A: SR5150 (150 V, 5 A, 0.92 V at 5 A, IFSM 150 A; DIYI, LCSC C129840); alternate ST STPS3150RL (150 V, 3 A, LCSC C262964)
their duty	VR 58 / 60 V; IF 1.07 A average, 1.45 A rms, 2.27 A peak: VR × 2.5
package	DO-201AD: body Ø5.3 × 9.5 max., leads Ø1.3; the cathode band
heat	0.44-0.59 W a diode: on copper pads or a small heatsink

NOTES

1 With Schottky parts the pump runs as modelled (z 1.142, AH 444 A-turns, a 16 % kick threshold); 1N540x-class silicon costs 6 % of the AH (sim/parts-first-cut-findings.md §2.1).

2 Listings: digikey SB5200 (6022615); lcsc.com C268577, C129840, C262964. Confirm on the maker's sheet.

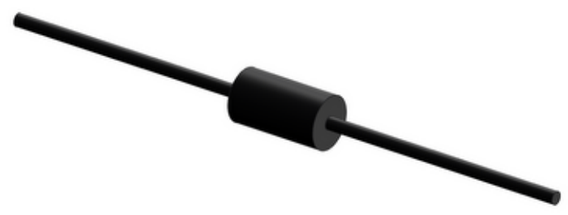

3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

Schottky rectifiers D1*–D4*, DO-201AD		Drawing no. **DCCREG-P-016**
Material: Schottky rectifier, axial DO-201AD		
Mass: 0.0012 kg	Qty per machine: 2 + 2	Rev A Sheet 100 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**BOUGHT · SOURCE CONTROL**