
## ENVELOPE (as the model draws it)  1:2

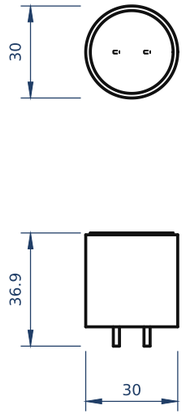


| specification | value |
|---|---|
| rating | 22 mF, 6.3-10 V, 105 °C, ≥ 2 A rms at 120 Hz, ESR ≤ 20 mΩ, polarised: + to nodes d / b |
| candidate | Rubycon 10MXG22000MEFCSN30X30: 22 000 µF, 10 V, 105 °C, Ø30 × 30 snap-in, 10 mm pitch, 2.5 A rms at 120 Hz, 3000 h at 105 °C (a retailer's listing; its ESR not found: confirm ≤ 20 mΩ) |
| alternate | Nichicon LGU1E223MELC: 22 mF, 25 V, 3.96 A, Ø35 × 35 (RS 846-6928) |
| duty | −0.54 … −0.44 V (nodes d / b positive), 0.63 A rms at 120 Hz, ≤ 1.3 mV the wrong way: × 12 on V, × 3.2 on ripple |
| mounting | beside the hub, clamped against 20-40 g [RH]; the clamp not drawn (its place OPEN) |

**NOTES**

1  The bypass is PROPOSED (sim/ah-steady-cusp-findings.md): it lifts the belt power to 18.13 W.

2  Snap-in pins on a board or soldered tags; keep the leads short (0.63 A rms at 120 Hz).

**REVISIONS**

| Rev | Date | Description |
|---|---|---|
| A | 2026-10-11 | First issue, draft for quotation |

| | |
|---|---|
| status | BOUGHT · for the first cut (PROPOSED) |
| qty per machine | 2 |
| used in | the rotor, beside the hub (place OPEN) |
| source | sim/parts-first-cut-findings.md §2.6, §4; sim/ah-steady-cusp-findings.md |



3-D view (axonometric, not to scale)

DCCREG turbine · bought parts

**AH bypass capacitor, 22 mF 10 V, snap-in**

Drawing no. **DCCREG-P-018**

Material: aluminium electrolytic, snap-in

| | | |
|---|---|---|
| Mass: — | Qty per machine: 2 | Rev A  Sheet 102 of 103  A3 |
| Scale: 1:2 | Tolerances: ISO 2768-mK | Date: 2026-10-11 |
| Drawn: generated by docs/make_drawing_set.py | Checked: —  Approved: — | **BOUGHT · SOURCE CONTROL** |