
## ENVELOPE (as the model draws it)  1:2

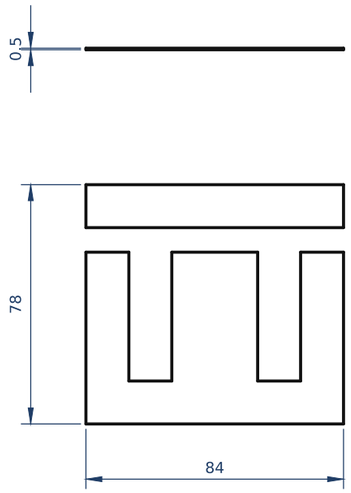


| specification | value |
|---|---|
| laminations | EI-84 scrapless (84 × 70, centre leg 28, outer legs 14, window 14 × 42), non-oriented SiFe 0.5 mm, M400-50A class (M235-35A halves the iron loss): about 67 E + 67 I a choke (35 mm at a 0.95 stacking factor) |
| bobbin | EI-84 for a 35 mm stack: 1.0 mm wall, 1.5 mm flanges, glass-filled PA66, UL 94 V-0 |
| wire | Ø1.40 enamelled copper, grade 2 (IEC 60317), class 180 or better: 24.6 m a choke |
| spacer | PET film 0.063 mm, the E / I joint (all three legs); trim L to 0.146 H on test |
| varnish, tape | class F impregnating varnish (VPI); polyester tape 0.05 mm between the layers |
| candidate | no maker's EI-84 lamination or bobbin listing was found in this session's search: to the specification |

**NOTES**

1  Drawn: one E and one I lamination as delivered (0.5 mm), the E's legs up; the 3-D view shows ten of each, stacked.

2  Any standard EI-84 bobbin for a 35 mm stack fits the winding as sized (sim/parts_first_cut.py winding()).

**REVISIONS**

| Rev | Date | Description |
|---|---|---|
| A | 2026-10-11 | First issue, draft for quotation |

| | |
|---|---|
| status | BOUGHT · for the first cut (PROPOSED) |
| qty per machine | for 2 chokes |
| used in | REL-720 |
| source | sim/parts-first-cut-findings.md §1; sim/parts_first_cut_results.json la_lb.chosen |



3-D view (axonometric, not to scale)

DCCREG turbine  ·  bought parts

**Choke parts: EI-84 laminations, bobbin, wire, spacer**

Drawing no. **DCCREG-P-019**

Material: M400-50A laminations; PA66-GF bobbin; Cu wire; PET film

Mass: —  |  Qty per machine: for 2 chokes  |  Rev A  Sheet 103 of 103  A3

Scale: 1:2  |  Tolerances: ISO 2768-mK  |  Date: 2026-10-11

Drawn: generated by docs/make_drawing_set.py  |  Checked: —  Approved: —  |  **BOUGHT · SOURCE CONTROL**