

SECTION A–A: utron A1 cut at its mid-height (z 121), seen from +z 1:1

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	UTR-101	half-core, M235-35A (hand A / B)	M235-35A	2
2	REL-702	neck strip, 80 % NiFe	80 % NiFe	1
3	REL-703	air-break spacer	G10	1
4	REL-704	slot cover	G10	1
5	REL-705	cheek (+v / -v)	G10	4
6	REL-706	yoke coil, 200 turns	Cu	1

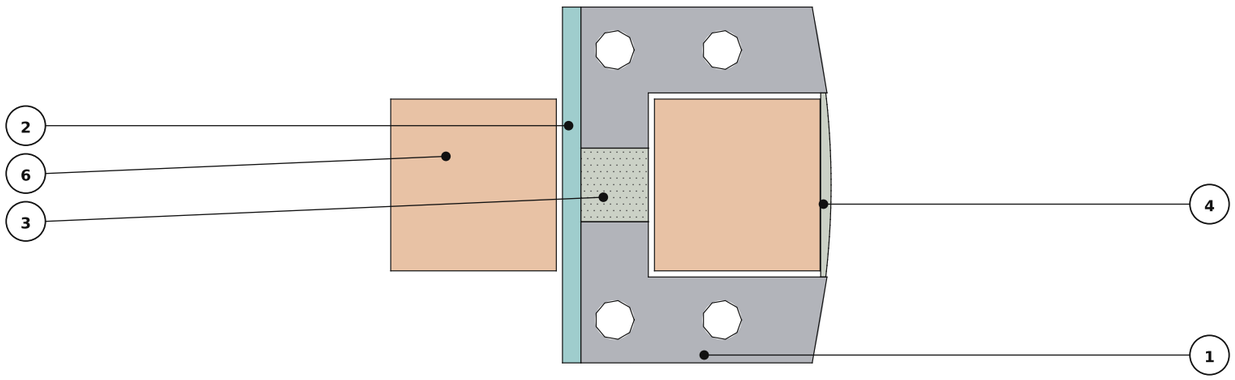



3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

NOTES

1 The record's wound utron: 200 turns of Ø1.55 on the split U-core, the 3.0 mm NiFe neck, the bonded slot cover, the studs (docs/make_utron_drawing.py).
2 The half-cores (UTR-101) bolt through the cheeks and the carrier discs (REL-711) on studs Ø6.4.
3 Six per machine, three a side; the air gap to the bridges 0.5 mm at the aligned position.

DCCREG turbine · the reluctance pump

Utron, wound: half-cores, neck strip, coil		Drawing no.
Material:		**DCCREG-REL-700**
Mass: —	Qty per machine: 6	Rev A Sheet 48 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**