TOP

FRONT

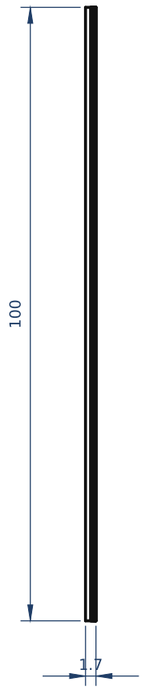

NOTES

1 Bonded over the coil in the slot; 0.83 thick at the tip (sim/utron_profile.py t_wedge).

2 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	LOCKED
qty per machine	6
used in	REL-700
source	sim/utron_profile.py spec (the record's utron)
mass each	0.00783 kg

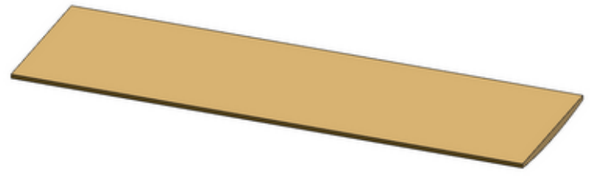

3-D view (axonometric, not to scale)

DCCREG turbine · the reluctance pump

Slot cover, G10, bonded		Drawing no.
Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2)		**DCCREG-REL-704**
Mass: 0.00783 kg	Qty per machine: 6	Rev A Sheet 52 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**