

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED · the first cut (sim/parts-first-cut-findings.md); its place on the rotor OPEN
qty per machine	2
used in	REL-720
source	sim/parts_first_cut_results.json la_lb.chosen (choke(), winding())
turns, wire	150 × Ø1.40 (OD 1.492)
layers	7 of 24; build 10.79
mean turn, length	164 mm; 24.6 m
R20, copper	0.276 Ω; 0.337 kg
mass each	0.337 kg


TOP

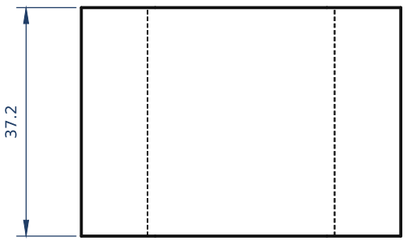

FRONT

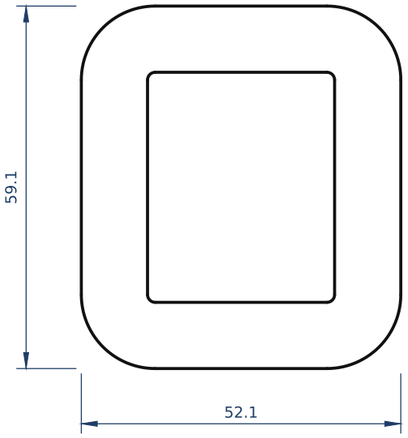


RIGHT

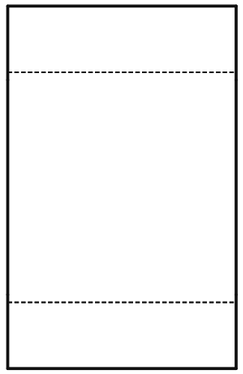

NOTES

1 150 turns of Ø1.40 grade 2, 7 layers of 24 at a 1.55 mm pitch on the bobbin, polyester tape 0.05 mm between the layers.
2 The leads (start and finish) sleeved and led out at the stack's +z face; turn to turn about 0.7 V, layer to layer about 40 V, which grade 2 holds with a wide margin (sim/parts-first-cut-findings.md §1).
3 The envelope as drawn: the build round the leg's 28 × 35 section from 1.25 to 12.04 mm, its corners R1.25 inside and R12.0 outside; 37.2 long between the flanges.
4 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

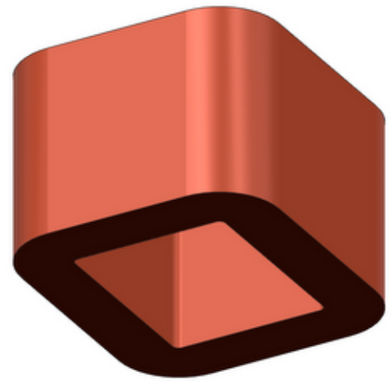

3-D view (axonometric, not to scale)

DCCREG turbine · the magnetic pump: La / Lb

La / Lb winding, 150 turns of Ø1.40		Drawing no.
Material: Cu magnet wire, grade 2 (IEC 60317), Ø1.40, impregnated		**DCCREG-REL-721**
Mass: 0.337 kg	Qty per machine: 2	Rev A Sheet 60 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**