

SECTION A–A 1:2

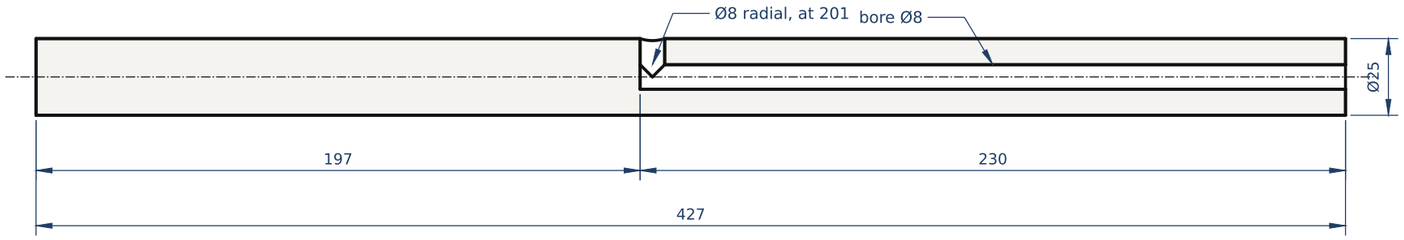

VIEW B 1:1




NOTES

1 Ø25 as the model draws it (sim/stack_sizing.py SHAFT_R 12.5); presets/hub-locked.json registers d 30. The shafts' study passes at d 25 (f1 81-86 Hz, sim/doubler-caps-findings.md §6): the designer's to settle.
2 Bearing seats Ø25 k5 at the three bearings' places (the Ca|reluctance, the bridge-ring and the end bearing, SKF 6205-2Z, P-001); the rest Ø25 h9.
3 The LV bore Ø8 from the flange's end to the radial exit Ø8; deburr both, no sharp edge for the cable.
4 Non-magnetic: check μr ≤ 1.05 after machining (the utrons' field).
5 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	1
used in	SHF-300
source	sim/stack_sizing.py SHAFT_R; sim/tube_geometry.py LayoutMachine (LV_BORE, LV_EXIT)
mass each	1.55 kg

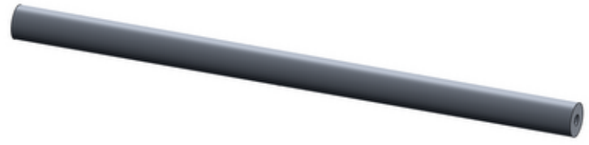

3-D view (axonometric, not to scale)

DCCREG turbine · the shaft

Shaft half A, Ø25, its LV bore

Drawing no. **DCCREG-SHF-301**

Material: austenitic stainless 1.4404 (316L), non-magnetic (μr ≤ 1.05)

Mass: 1.55 kg	Qty per machine: 1	Rev A Sheet 11 of 103 A3
Scale: 1:2, 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**