


For $V_{CC}=3.3V$, all caps are $0.1\mu F$
(See Table 2, pg 9 in datasheet)


Serial I/O

Slot presence

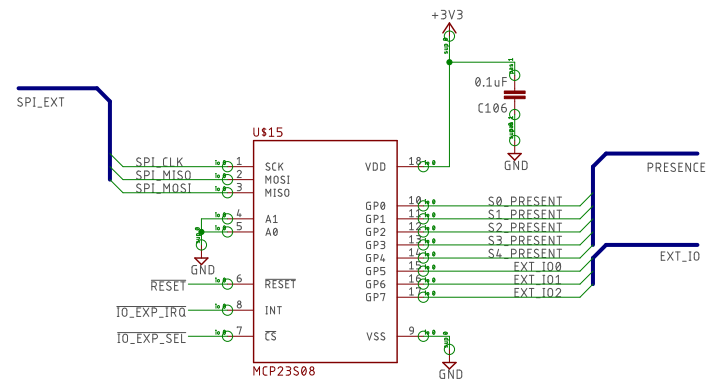



Serial IO / Slot presence	
xio2	
22/08/2018 09:50	
Sheet: 6/18	

USB2 connections	
Trace thickness	0.035 mm
Prepreg thickness	0.12 mm
Trace width	10 mil
Inter-trace spacing	7 mil
Prepreg dielectric	4.4
Differential impedance	90.5 ohms

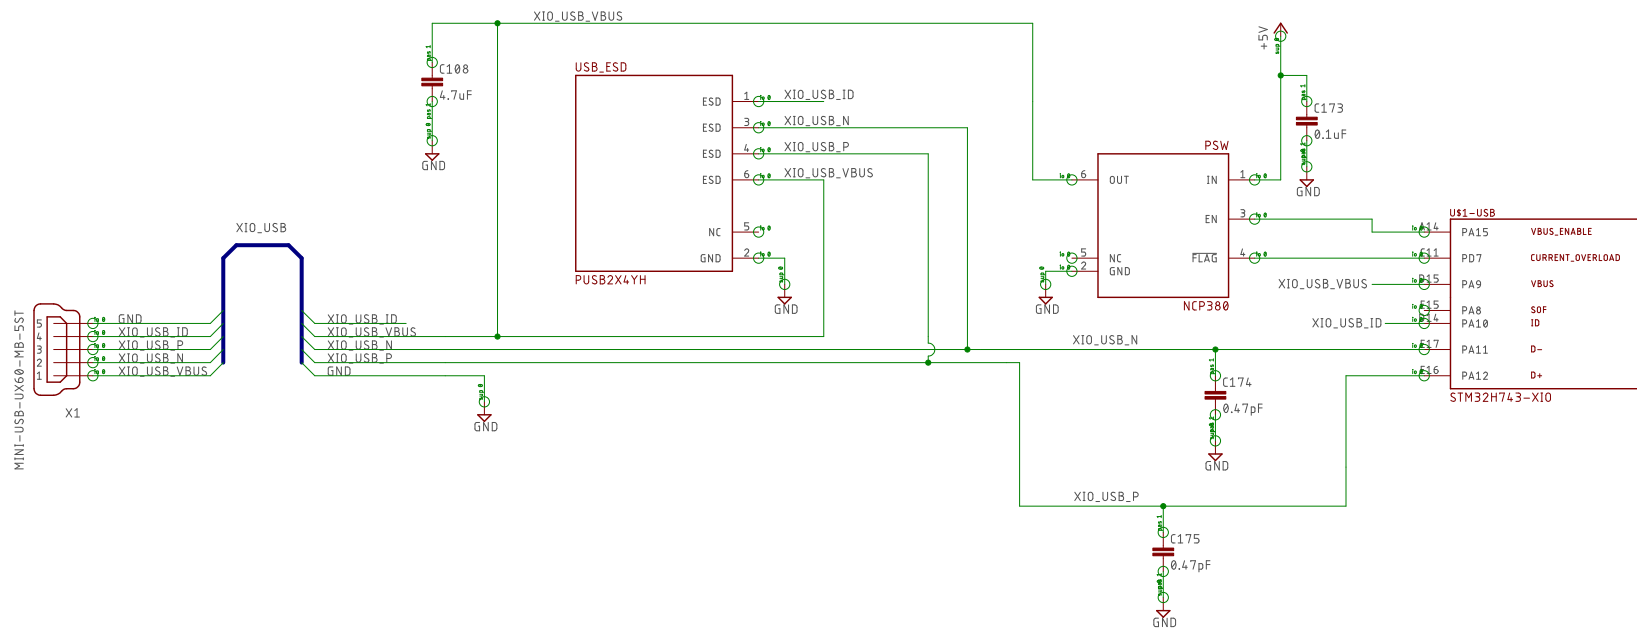

XIO USB OTG
xio2
22/08/2018 09:50
Sheet: 7/18

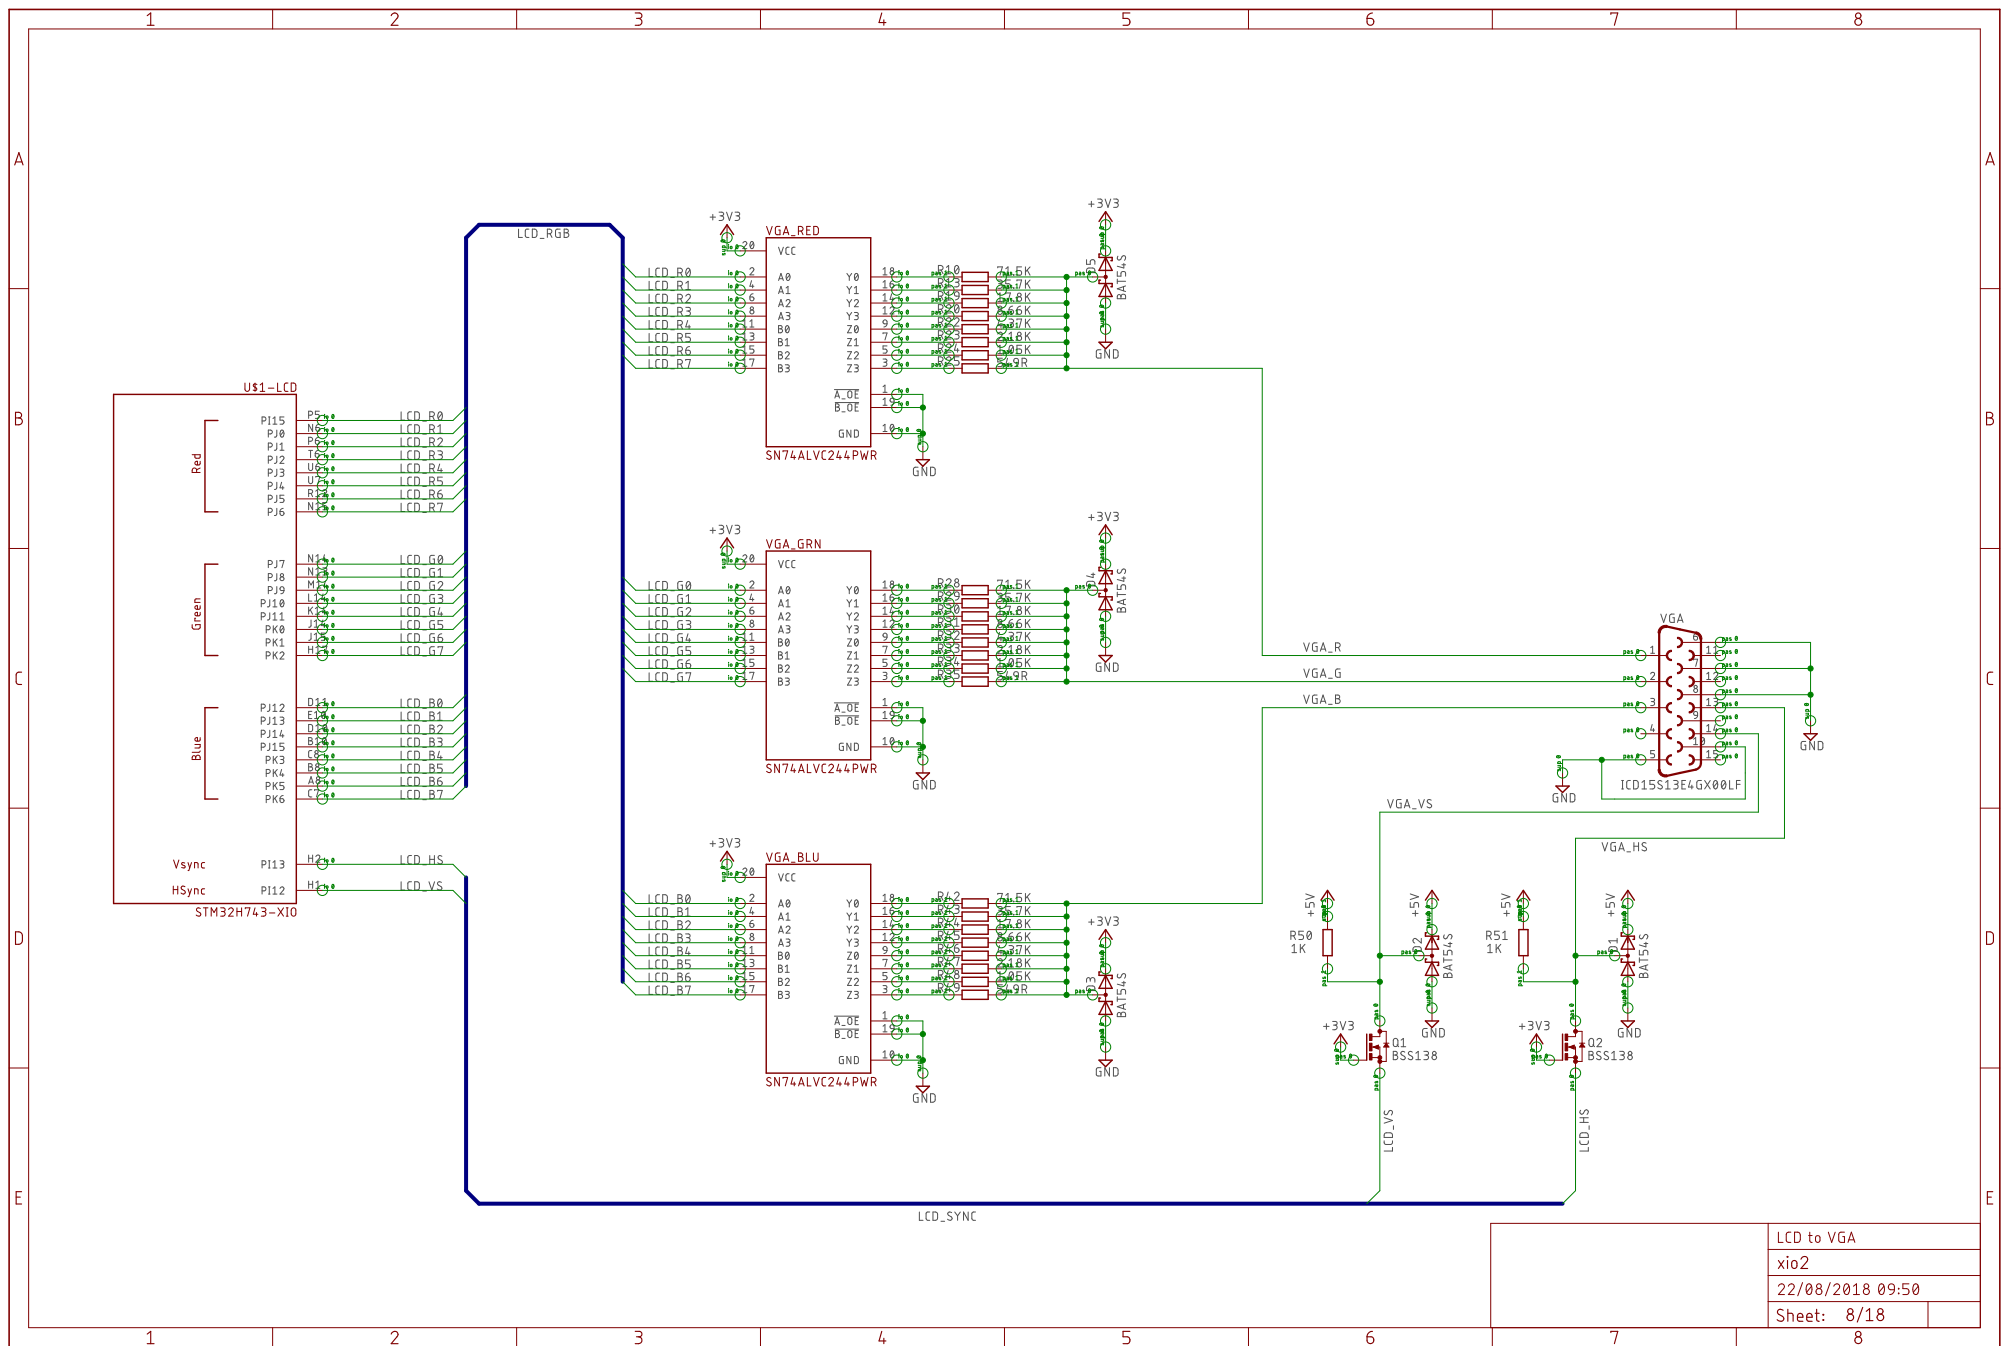

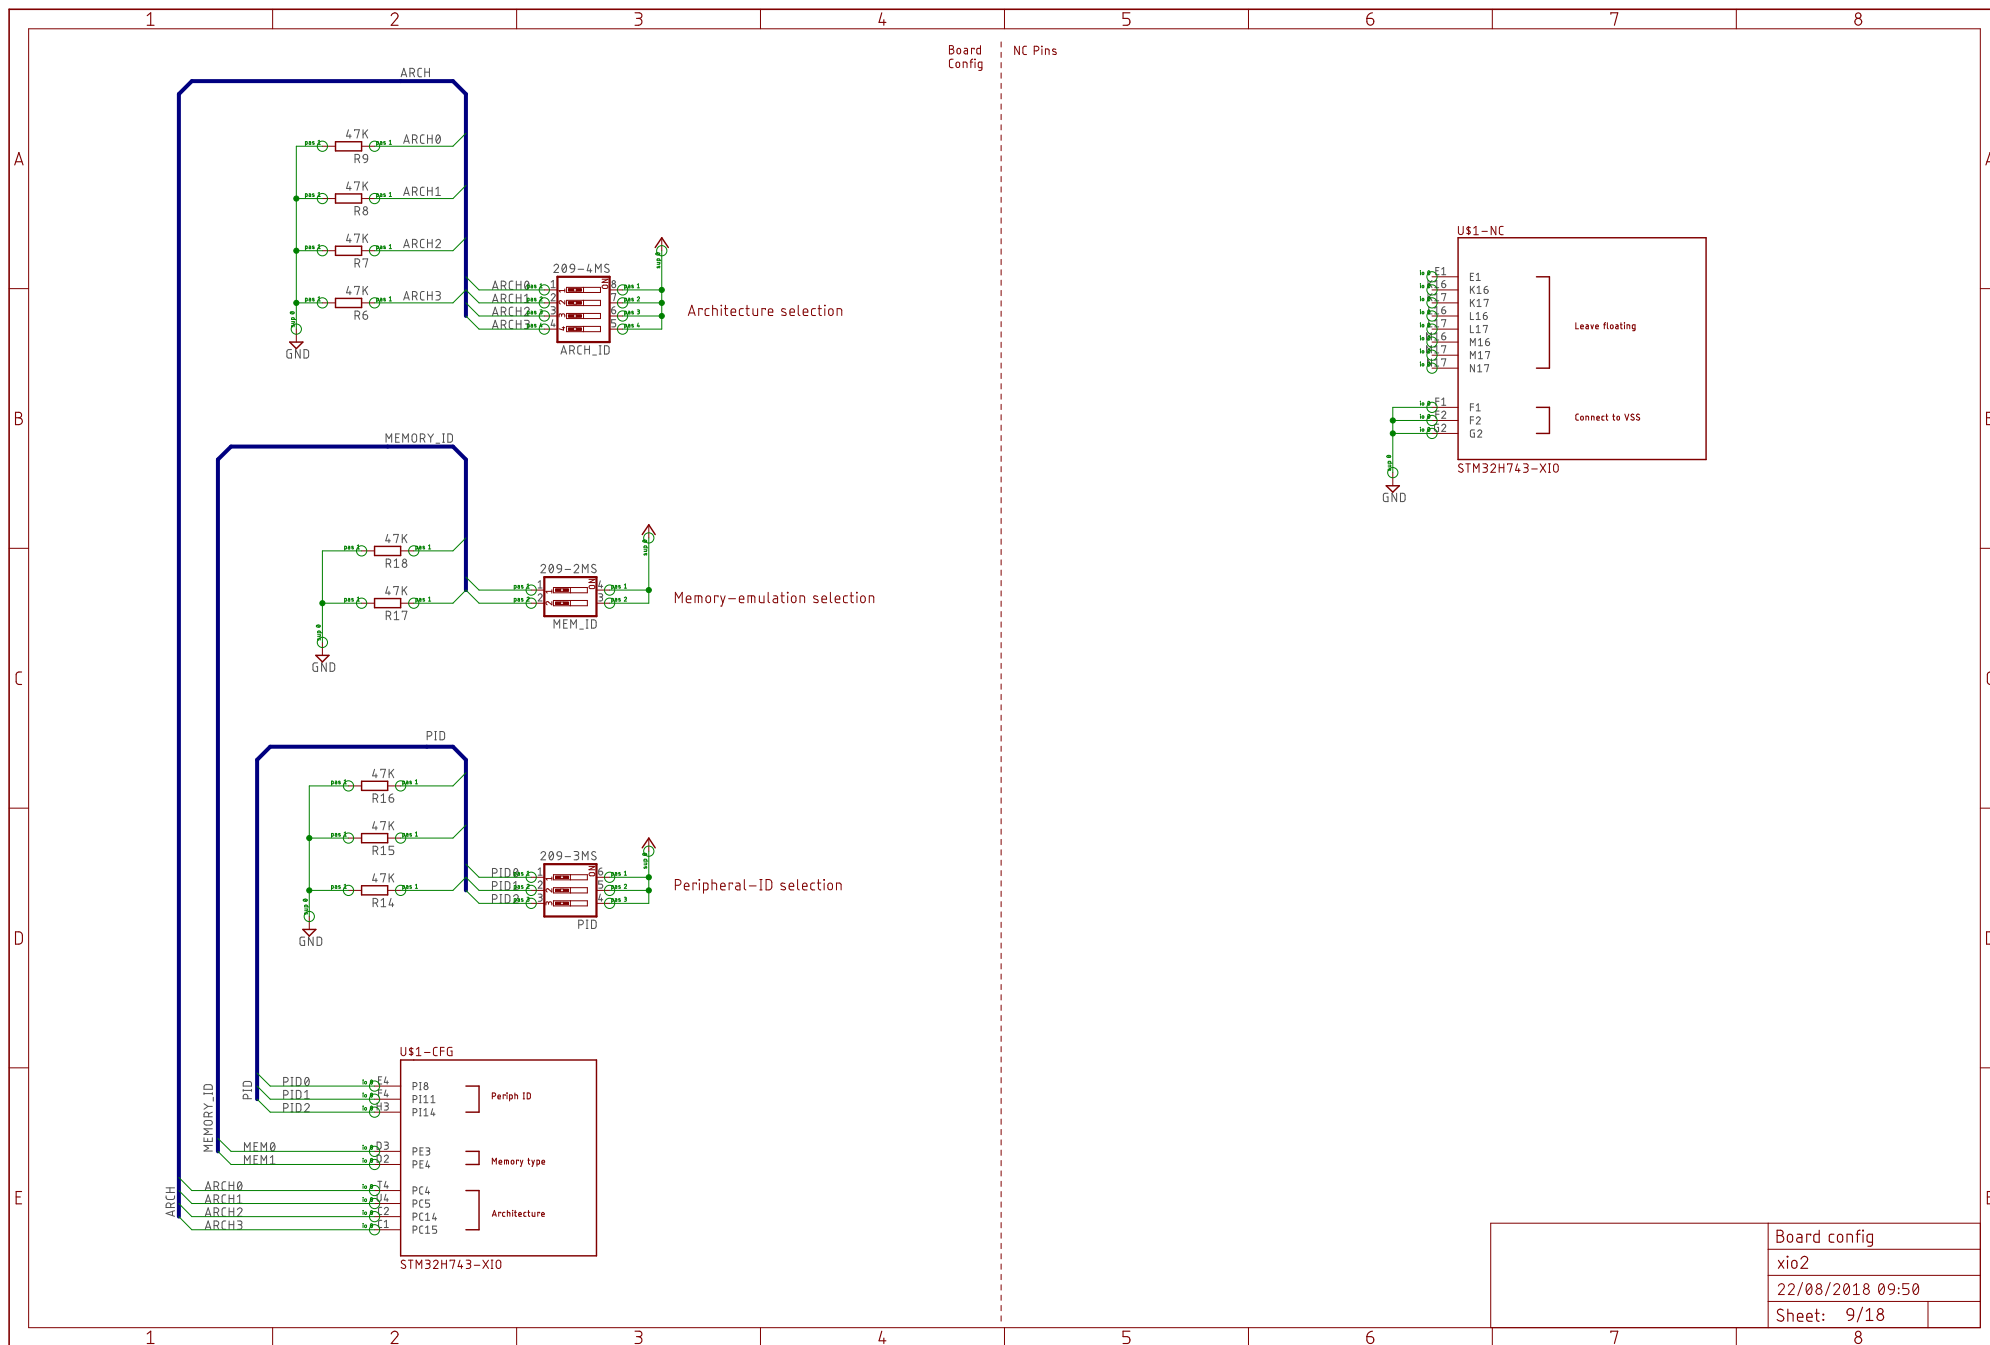

Board config

xio2

22/08/2018 09:50

Sheet: 9/18

