
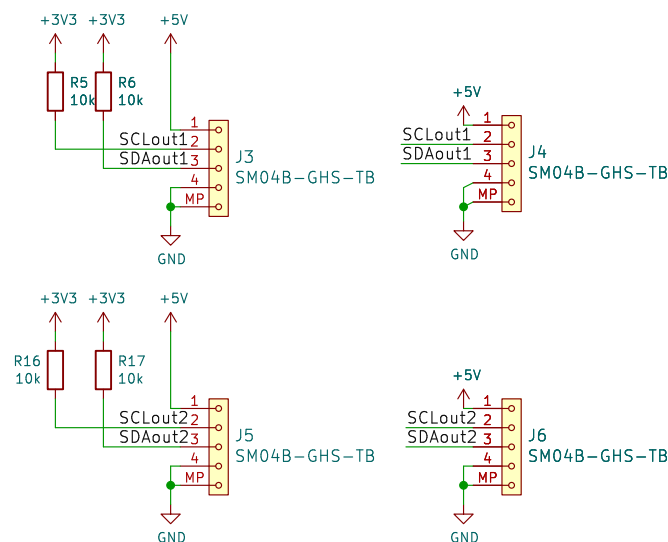
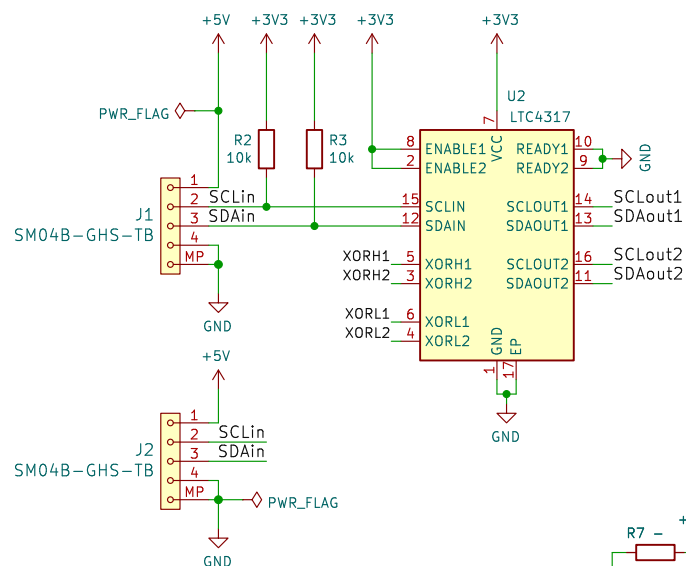
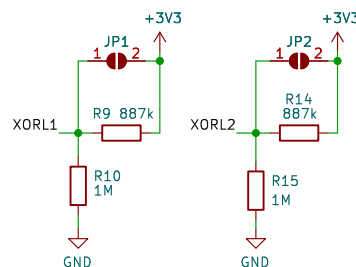


Address XOR translations:
Output 1 (JP1):
Open - 0x08
Shorted - 0x0f
Output 2 (JP2):
Open - 0x78
Shorted - 0x7f

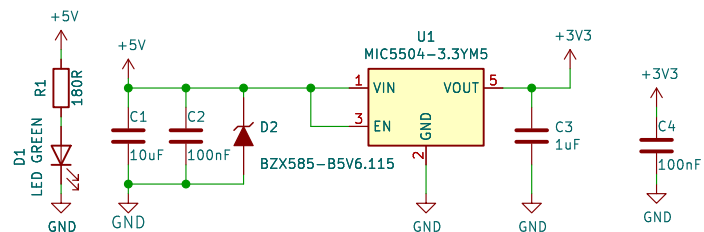

TFI2CADT01B		
I2C address translator with multiple translation options		
Author: ThunderFly s.r.o.		
Size: A4	Page: 1/1	Date: 2025-09-26