

A

A

B


B

C

C

D

D

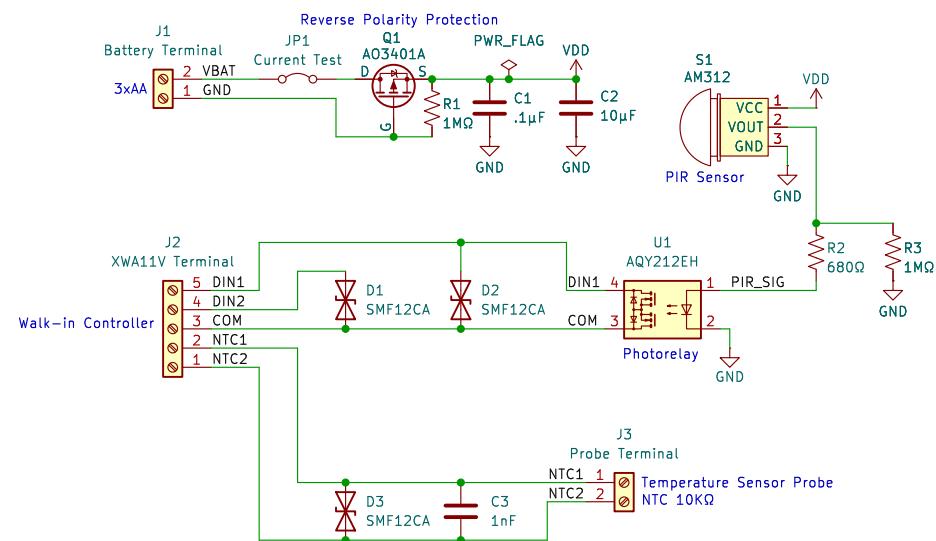

Battery-powered PIR interface providing an isolated dry-contact output to an XWA11V controller for motion-activated lighting. Includes NTC probe pass-through and field wiring protection.

Eli Bell

Sheet: /
File: WALKIN_PIR_IF.kicad_sch

Title: Walk-In PIR Motion Interface

Size: A4 Date: 2025-12-30
KiCad E.D.A. 9.0.1

Rev: A
Id: 1/1

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole