


Parameter	Min	Typ	Max	Unit
Optical Power	0.6	0.75	0.9	mW
Operating Voltage	2.7	3	3.5	V
Operating Current	-	-	30	mA
Wave Length At Peak Emission	845	855	865	nM
Operating Temp Range	-10	25	50	°C
Storage Temp Range	-40	-	80	°C
Beam Size At 10m	-	-	15X30	mm
Beam Divergence Angle	-	-	1	mrad

6		7		8	
The Restriction of Hazardous Substances					
Cadmium(Cd)	Plumbum(Pb)	Hydrargyrum(Hg)	Hexad chromium(Cr ⁶⁺)		
<75ppm	<750ppm	<750ppm	<750ppm		
Polybromated Biphenyls(PBB)			Polybromated Diphenylethers(PBDE)		
<750ppm			<750ppm		
Bis(2-ethylhexyl) phthalate(DEHP)			Butyl benzyl phthalate(BBP)		
<750ppm			<750ppm		
Dibutyl phthalate(DBP)			Diisobutyl phthalate(DIBP)		
<750ppm			<750ppm		
Note: Exclusive item, Concentration of Plumbum(Pb): Aluminum alloy<0.32WT%; Cuprum alloy<3.2WT%; Steel alloy<0.28WT%; Soldering tin<0.1WT%					

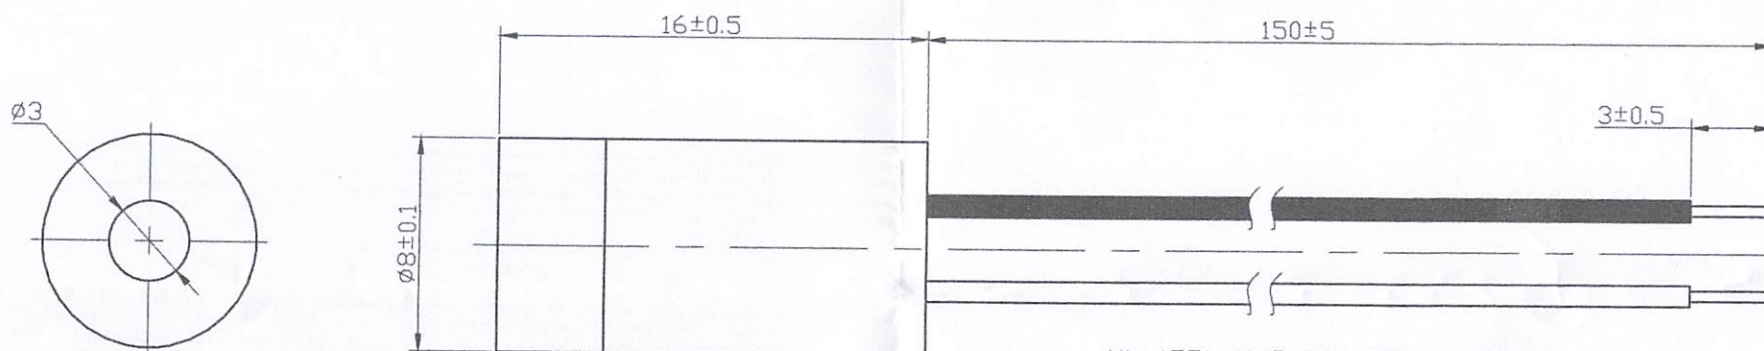

Note:

1. When testing output power, the distance from module light hole to sensor is about 100±5mm at environment temperature 25±0.5°C.
2. End port of laser module filled with silicone.
3. Safety compliance: CE Certification with declaration.
4. RoHS Compliant.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
TOLERANCES:
XX ±0.3 ANGLES ±30'
XXX ±0.05 FRACTIONS ±
SURFACE FINISH=6.3 √ OR BETTER
DEBURR&BREAK ALL SHARP EDGES

Material:

Brass

Module printed code/date code:

-

Surface Finish:

-

CONTRACT NO.:

-

REV. Zone

Drawn By:

Water Chen

2025.09.19

Checked By:

Junlei Gong

2025.09.19

QA By:

-

Approved By:


-

Standardized By:

Luoyan

2025.09.19

Projection Type:



Third Angle

Description

By

Date

EGISMOS

CORPORATION

Title:

IR Laser Module

Unit:

CODE IDENT NO.

DWG NO.:

REV.:

mm

-

S838501D-CU01A

A

SCALE:

4:1

Quantity:

1

SHEET:

1

OF 1

WRITTEN	CHECKED	APPROVED
---------	---------	----------

Ref. No. : 20251226

Shirley	/	D
---------	---	---

☐ OUTGOING

SAMPLE

☐ **ALTERNATION**

☐ OTHERS

Final Judgement

Customer	ROBO	PO No.	ROB251222
----------	------	--------	-----------

00C

ACCEPTED

Product Code	S838501D-CU01A	Product Name	S8 laser modules
--------------	----------------	--------------	------------------

Specificati on	855nm/3V/30mA/ 1mW	Quantity	4pcs
-------------------	-----------------------	----------	------

REV:	A	LOT NO:	20251226
------	---	---------	----------

power meter	GCZJ000504-22	
-------------	---------------	--

Inspection Items

Tools Code

Sampling Standard (ANSI/ASQ Z1.4-2008 ||)

(1)	Dimension	(9)	Boresight	C	Callipers	Sampling Standard N=(4)	AQL			Rejected Qty	Result
(2)	Current	(10)	wavelength	E	Eye Measure		CR=(0)	AC=	0	0	OK
(3)	Output Power	(11)	Voltage	PM	power meter			RE=	0		
(4)	Laser Beam/Dot	(12)	Wire color	SM	Spectrum meter		MA=(0.65)	AC=	0	0	OK
(5)	Wire	(13)	case material	R	Ruler			RE=	1		
(6)	Beam span angle	(14)	end part seal	PS	Power Supplier		MI=(1.0)	AC=	0	0	OK
(7)	Line Span Angle	(15)	(Anodized black)	B, F	Beam Profiler			RE=	1		
(8)	Appearance	(16)	Others	CCD	Display						

NO	ITEMS	(1)	(1)	(2)	(3)	(4)	(5)	(10)	(8)	(13)	(14)	Judgement
	Spec.	$\phi 8 \pm 0.1 \text{mm}$	$16 \pm 0.5 \text{mm}$	$\leq 30 \text{mA}$	$\frac{1 \text{mm}}{0.6 \sim 0.9}$	$\leq 15 \times 30 \text{mm}$ at 10m	$150 \pm 5 \text{mm}$	$845 \sim 865 \text{nm}$		Aluminum	Silicone	
	Tools	C	C	PS	PM	CCD	R	SM	F	F	F	

1	7.97	16.24	13	0.78	OK	150	852	OK	OK	OK	OK
2	7.97	16.19	13	0.79	OK	150	852	OK	OK	OK	OK
3	7.97	16.12	13	0.78	OK	150	852	OK	OK	OK	OK
4	7.97	16.23	13	0.79	OK	150	852	OK	OK	OK	OK