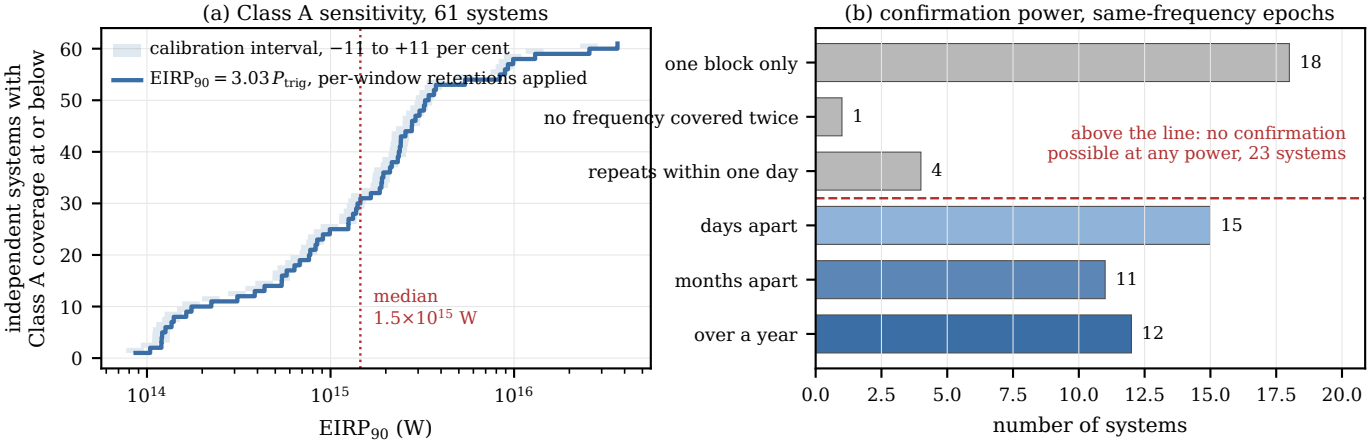
(a) Class A sensitivity, 61 systems
calibration interval, −11 to +11 per cent
EIRP90 = 3.03 Ptrig, per-window retentions applied
independent systems with Class A coverage at or below
median
1.5×10^15 W
EIRP90 (W)
(b) confirmation power, same-frequency epochs
one block only
18
no frequency covered twice
1
repeats within one day
4
above the line: no confirmation possible at any power, 23 systems
days apart
15
months apart
11
over a year
12
number of systems